

**PRE-LITE®**

NIEUW / NEW

# Exclusieve hotel- en tuinverlichting

Exclusive hotel and garden lighting



## Inhoud

|                     |    |                 |    |
|---------------------|----|-----------------|----|
| Down Light          | 4  | Deck Light      | 42 |
| Down Light          | 6  | Deck Light      | 44 |
| Down Light          | 8  | Deck Light      | 46 |
|                     |    | Deck Light      | 48 |
| Reading Wall Light  | 10 |                 |    |
| Reading Wall Light  | 12 | Inground Light  | 50 |
| Reading Wall Light  | 14 | Inground Light  | 52 |
|                     |    | Inground Light  | 54 |
| Spot Light          | 16 | Inground Light  | 56 |
|                     |    | Inground Light  | 58 |
| Wall Washer Light   | 18 | Inground Light  | 60 |
|                     |    | Inground Light  | 62 |
| Wall Light          | 20 | Inground Light  | 64 |
| Wall Light          | 22 | Inground Light  | 66 |
| Wall Light          | 24 |                 |    |
| Wall Light          | 26 | Pathway Light   | 68 |
| Wall Light          | 28 |                 |    |
| Wall Light          | 30 | Landscape Light | 70 |
|                     |    | Landscape Light | 72 |
| Sensor Wall Light   | 32 | Landscape Light | 74 |
|                     |    | Landscape Light | 76 |
| Recessed Step Light | 34 |                 |    |
| Recessed Step Light | 36 |                 |    |
| Recessed Step Light | 38 |                 |    |
| Recessed Step Light | 40 |                 |    |

Pre-Lite  
 Handelsweg 13C  
 3881 LS Putten  
 +31(088) 2366050  
[www.pre-lite.nl](http://www.pre-lite.nl)

*Pre-Lite is een Nimedoo B.V. Company*




Down Light




600 100

| MATERIAL                   |
|----------------------------|
| AL                         |
| INPUT VOLTAGE              |
| 220-240VAC                 |
| POWER                      |
| 8W                         |
| CCT                        |
| 2700K, 3000K, 4000K, 6000K |
| IP                         |
| 20                         |



600 101

| MATERIAL                   |
|----------------------------|
| AL                         |
| INPUT VOLTAGE              |
| 220-240VAC                 |
| POWER                      |
| 8W                         |
| CCT                        |
| 2700K, 3000K, 4000K, 6000K |
| IP                         |
| 20                         |




|                       |                                         |
|-----------------------|-----------------------------------------|
| LAMP BODY             | Aluminium                               |
| OPERATION TEMPERATURE | -20°C-40°C                              |
| DIMMING SUPPORT       | Dali, 1-10V, Phase Cut, Triac Available |

OPTICS


15° 24° 36° 50°



PHOTOMETRICS

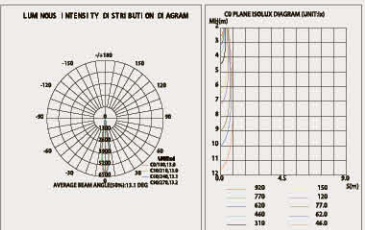

600 100

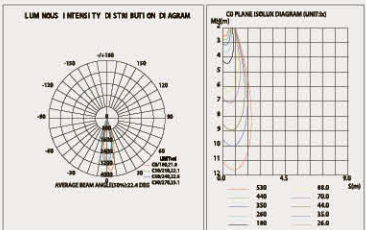

600 101






Down Light




600 102

| MATERIAL                                |    |
|-----------------------------------------|----|
| AL                                      |    |
| INPUT VOLTAGE                           |    |
| 220-240VAC                              |    |
| POWER                                   | IP |
| 10W                                     | 44 |
| CCT                                     |    |
| 2700K, 3000K, 4000K, 5000K, 6000K, 5CCT |    |




600 103

| MATERIAL                                |    |
|-----------------------------------------|----|
| AL                                      |    |
| INPUT VOLTAGE                           |    |
| 220-240VAC                              |    |
| POWER                                   | IP |
| 12W                                     | 65 |
| CCT                                     |    |
| 2700K, 3000K, 4000K, 5000K, 6000K, 5CCT |    |




600 104

| MATERIAL                                |    |
|-----------------------------------------|----|
| AL                                      |    |
| INPUT VOLTAGE                           |    |
| 220-240VAC                              |    |
| POWER                                   | IP |
| 18W                                     | 65 |
| CCT                                     |    |
| 2700K, 3000K, 4000K, 5000K, 6000K, 5CCT |    |



600 105

| MATERIAL                                |    |
|-----------------------------------------|----|
| AL                                      |    |
| INPUT VOLTAGE                           |    |
| 220-240VAC                              |    |
| POWER                                   | IP |
| 28W                                     | 65 |
| CCT                                     |    |
| 2700K, 3000K, 4000K, 5000K, 6000K, 5CCT |    |



600 106


| MATERIAL                                |    |
|-----------------------------------------|----|
| AL                                      |    |
| INPUT VOLTAGE                           |    |
| 220-240VAC                              |    |
| POWER                                   | IP |
| 38W                                     | 65 |
| CCT                                     |    |
| 2700K, 3000K, 4000K, 5000K, 6000K, 5CCT |    |




FRONT COVER  
LAMP BODY  
GLASS  
OPERATION TEMPERATURE  
DIMMING SUPPORT

Die-casting aluminium  
Die-casting aluminium  
Tempered glass T=3mm  
-20°C-40°C  
Triac DALI Available


600 102




600 103





600 104




600 105



600 106

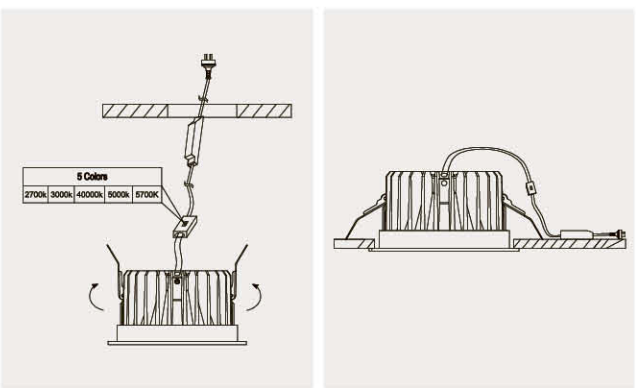

PHOTOMETRICS

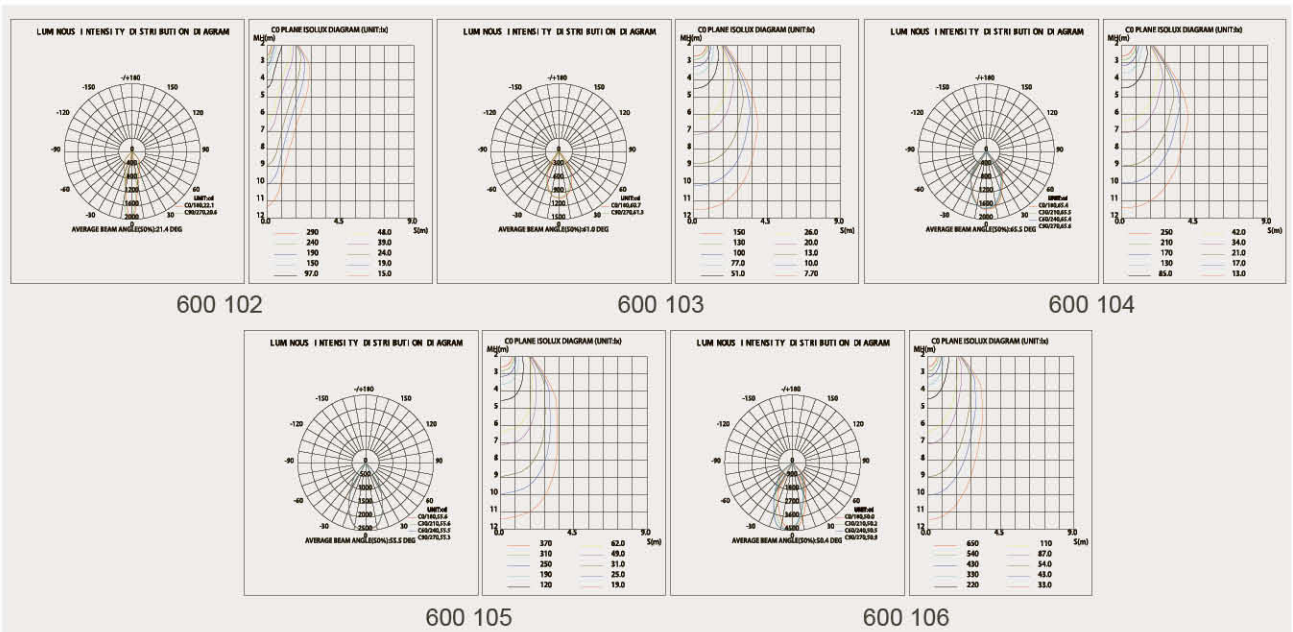





Technical drawing of the lamp base. The top view shows a circular base with a diameter of  $\varnothing 107$ . The side view shows a height of 59. The base has a textured, cylindrical upper section and a flat, circular lower section.



Technical drawing of the ceiling light fixture showing top and side views with dimensions:

- Top view: A circular light fixture with a diameter of  $\varnothing 163$ .
- Side view: A cross-section showing the fixture's height of 78 and its mounting structure.



Brushed 316 Stainless Steel  
Die-casting aluminium  
Tempered glass T=3mm  
-20°C-40°C  
Triac DALI Available


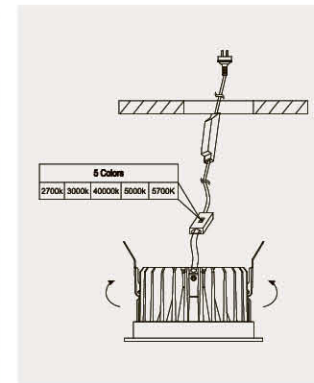


Figure 10 consists of four polar plots labeled (a) through (d), each showing the radiation pattern of a 100-W, 12.5-MHz antenna at a different azimuth angle. The plots are arranged in a 2x2 grid. Each plot has a circular grid with radial lines every 10 degrees and concentric circles representing magnitude levels from 0.0 to 1.0. The x-axis is labeled 'AVERAGE BEAM ANGLE (DEGREES) ± 1 DEG' and the y-axis is labeled 'MAGNITUDE'. The radiation pattern is a circular sector with a peak magnitude of 1.0 at 0° and a minimum of 0.0 at 180°.

600 107

600 108

600 109

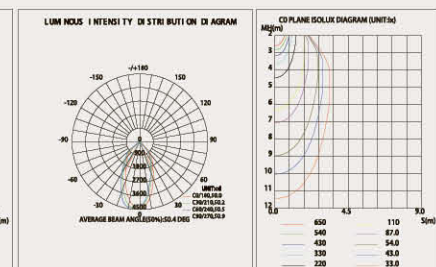

600 111



Reading Wall Light



600 200



600 203

|                                  |    |
|----------------------------------|----|
| MATERIAL                         |    |
| AL                               |    |
| INPUT VOLTAGE                    |    |
| 220-240VAC                       |    |
| POWER                            |    |
| 4W                               |    |
| CCT                              |    |
| 2700K, 3000K, 4000K, 6000K, 3CCT |    |
| CRI                              | IP |
| 90                               | 20 |



600 200



600 201




600 202



600 203



600 204



600 205


|                                  |    |
|----------------------------------|----|
| MATERIAL                         |    |
| AL                               |    |
| INPUT VOLTAGE                    |    |
| 220-240VAC                       |    |
| POWER                            |    |
| Spotlight:3W, Backlight:3W       |    |
| CCT                              |    |
| 2700K, 3000K, 4000K, 6000K, 3CCT |    |
| CRI                              | IP |
| 90                               | 20 |



600 205



600 206




|                       |                                                                |
|-----------------------|----------------------------------------------------------------|
| LAMP BODY             | Aluminium                                                      |
| LAMP BASE             | Aluminium                                                      |
|                       | UV textured powder coated                                      |
|                       | T=60-90µm (white and black finishing)                          |
| OPERATION TEMPERATURE | -20°C-40°C                                                     |
| DIMMING SUPPORT       | Triac Available                                                |
| OPTICS                | 10° 24° 45° 60°                                                |
| SWITCH                | Button switch( D-1034-B) or<br>Touch dimming switch( D-1034-T) |




|                       |                                                           |
|-----------------------|-----------------------------------------------------------|
| LAMP BODY             | Aluminium                                                 |
| LAMP BASE             | Aluminium                                                 |
|                       | UV textured powder coated T=60-90µm                       |
| OPERATION TEMPERATURE | -20°C-40°C                                                |
| DIMMING SUPPORT       | Triac Available                                           |
| OPTICS                | 10° 24° 45° 60°                                           |
| SWITCH                | Rotary switch( D-1046) or<br>Touch dimming switch(D-1047) |



PHOTOMETRICS

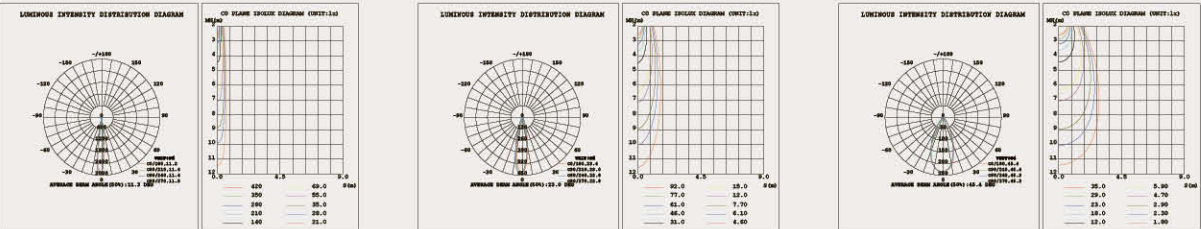

PHOTOMETRICS

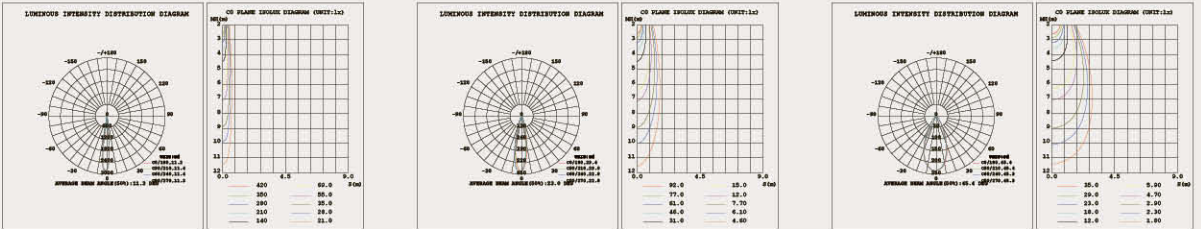



Reading Wall Light



600 207



600 211

|                                  |    |
|----------------------------------|----|
| MATERIAL                         |    |
| AL                               |    |
| INPUT VOLTAGE                    |    |
| 220-240VAC                       |    |
| POWER                            |    |
| 3.5W                             |    |
| CCT                              |    |
| 2700K, 3000K, 4000K, 6000K, 3CCT |    |
| CRI                              | IP |
| 90                               | 20 |



600 207


600 208

600 204




600 210

600 211




600 213

|                                                |    |
|------------------------------------------------|----|
| MATERIAL                                       |    |
| AL                                             |    |
| INPUT VOLTAGE                                  |    |
| 220-240VAC                                     |    |
| POWER                                          |    |
| 4W                                             |    |
| CCT                                            |    |
| 2700K, 3000K, 4000K, 6000K, 1800-3000K(D-1070) |    |
| CRI                                            | IP |
| 80                                             | 20 |

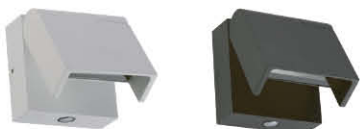

600 212

600 213




|                       |                                                         |
|-----------------------|---------------------------------------------------------|
| LAMP BODY             | Aluminium                                               |
| LAMP BASE             | Aluminium                                               |
|                       | UV textured powder coated T=60-90µm                     |
|                       | (white and black finishing)                             |
| OPERATION TEMPERATURE | -20°C-40°C                                              |
| DIMMING SUPPORT       | Triac Available                                         |
| OPTICS                | 10° 24° 45° 60°                                         |
| SWITCH                | Rotary switch (D-1048) or Touch dimming switch (D-1049) |




|                       |                                     |
|-----------------------|-------------------------------------|
| LAMP BODY             | Aluminium                           |
| LAMP BASE             | Aluminium                           |
|                       | UV textured powder coated T=60-90µm |
| OPERATION TEMPERATURE | -20°C-40°C                          |
| DIMMING SUPPORT       | Triac Available                     |
| OPTICS                | 60°                                 |
| SWITCH                | Touch dimming switch                |



PHOTOMETRICS

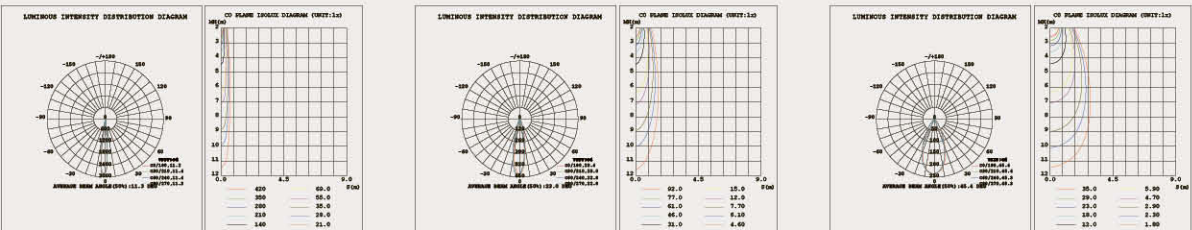

PHOTOMETRICS

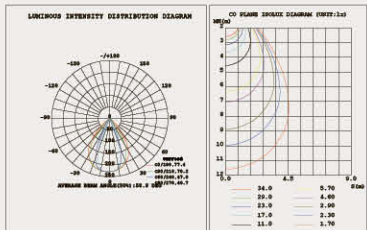



Reading Wall Light



600 300 600 301

| MATERIAL                         |    |
|----------------------------------|----|
| AL                               |    |
| INPUT VOLTAGE                    |    |
| 220-240VAC                       |    |
| POWER                            |    |
| 3.5W                             |    |
| CCT                              |    |
| 2700K, 3000K, 4000K, 6000K, 3CCT |    |
| CRI                              | IP |
| 90                               | 20 |



600 300 600 301



600 302 600 303

| MATERIAL                         |    |
|----------------------------------|----|
| AL                               |    |
| INPUT VOLTAGE                    |    |
| 220-240VAC                       |    |
| POWER                            |    |
| 3.5W                             |    |
| CCT                              |    |
| 2700K, 3000K, 4000K, 6000K, 3CCT |    |
| CRI                              | IP |
| 90                               | 20 |




600 302 600 303


|                       |                                                            |
|-----------------------|------------------------------------------------------------|
| LAMP BODY             | Aluminium                                                  |
| LAMP BASE             | Aluminium                                                  |
|                       | UV textured powder coated T=60-90µm                        |
| OPERATION TEMPERATURE | -20°C-40°C                                                 |
| DIMMING SUPPORT       | Triac Available                                            |
| OPTICS                | 10° 24° 45° 60°                                            |
| SWITCH                | Rotary switch (D-1052) or<br>Touch dimming switch (D-1053) |




|                       |                                                            |
|-----------------------|------------------------------------------------------------|
| LAMP BODY             | Aluminium                                                  |
| LAMP BASE             | Aluminium                                                  |
|                       | UV textured powder<br>coated T=60-90µm                     |
| OPERATION TEMPERATURE | -20°C-40°C                                                 |
| DIMMING SUPPORT       | Triac Available                                            |
| OPTICS                | 10° 24° 45° 60°                                            |
| SWITCH                | Rotary switch (D-1050) or<br>Touch dimming switch (D-1051) |

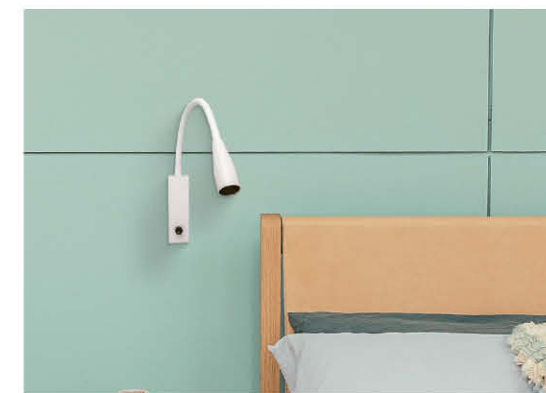

PHOTOMETRICS

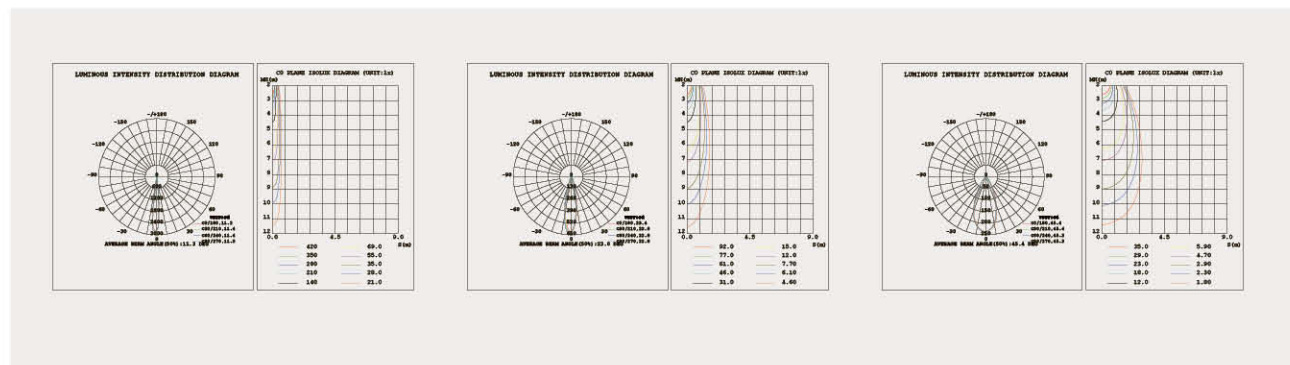

PHOTOMETRICS

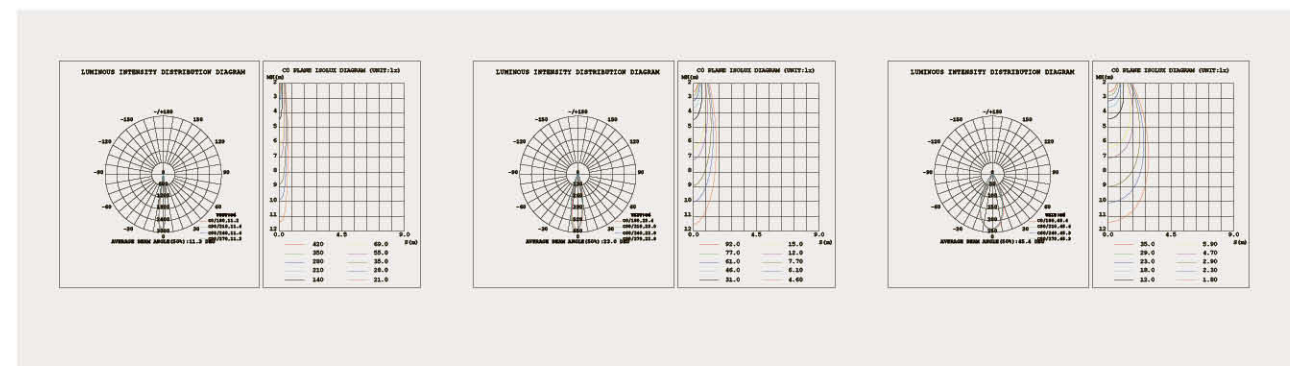




Spot Light



600 350

| MATERIAL                          |
|-----------------------------------|
| AL                                |
| INPUT VOLTAGE                     |
| DC12V, DC24V, 220-240VAC          |
| POWER                             |
| 5W                                |
| CCT                               |
| 2700K, 3000K, 4000K, 5000K, 6000K |
| IP                                |
| 65                                |

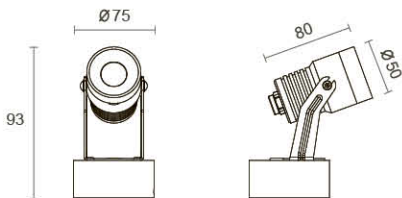


|                       |                                     |
|-----------------------|-------------------------------------|
| FRONT COVER           | Aluminium                           |
| LAMP BODY             | Aluminium                           |
|                       | UV textured powder coated T=60-90µm |
| POWER CABLE           | H05RN-F rubber cable                |
| OPERATION TEMPERATURE | -20°C-40°C                          |
| DIMMING SUPPORT       | Triac PWM Available                 |

| OPTICS      |
|-------------|
| 15° 24° 36° |
| 358/359/360 |



600 351

| MATERIAL                          |
|-----------------------------------|
| AL                                |
| INPUT VOLTAGE                     |
| DC12V, DC24V, 220-240VAC          |
| POWER                             |
| 10W                               |
| CCT                               |
| 2700K, 3000K, 4000K, 5000K, 6000K |
| IP                                |
| 65                                |

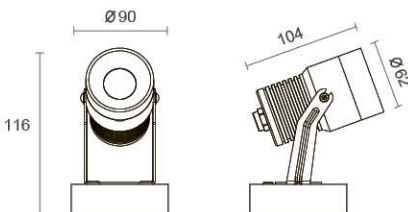

MOUNTING 1 (Spike)




MOUNTING 2 (Inground Surface)



MOUNTING 3 (Spot)



MOUNTING 5 (Pole)

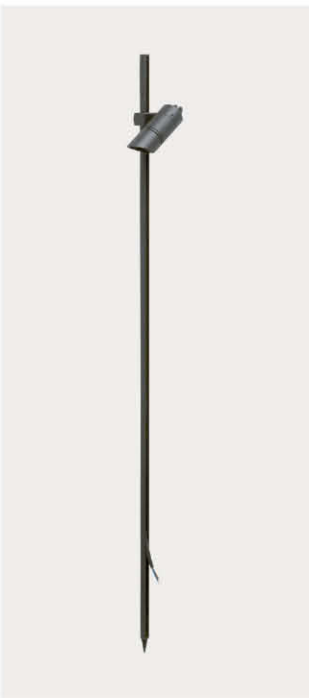

OPTIONAL ACCESSOR



600 354/355/356

MOUNTING 4 (Tree Pole Strap)





600 357




600 352

| MATERIAL                          |
|-----------------------------------|
| AL                                |
| INPUT VOLTAGE                     |
| DC12V, DC24V, 220-240VAC          |
| POWER                             |
| 15W                               |
| CCT                               |
| 2700K, 3000K, 4000K, 5000K, 6000K |
| IP                                |
| 65                                |

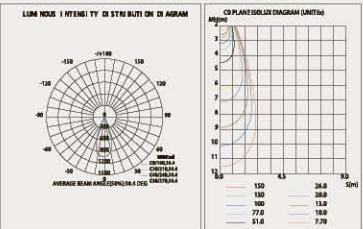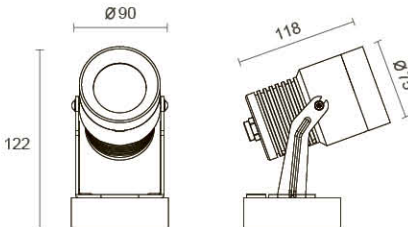

200 350

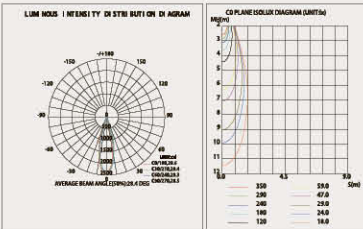


600 351



600 353

| MATERIAL                          |
|-----------------------------------|
| AL                                |
| INPUT VOLTAGE                     |
| DC12V, DC24V, 220-240VAC          |
| POWER                             |
| 25W                               |
| CCT                               |
| 2700K, 3000K, 4000K, 5000K, 6000K |
| IP                                |
| 65                                |

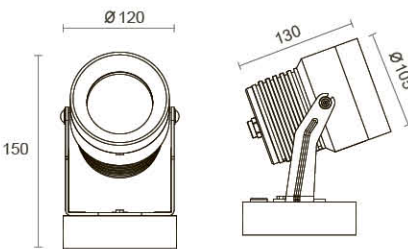



Wall Washer Light




600 400

| MATERIAL                         |
|----------------------------------|
| AL                               |
| INPUT VOLTAGE                    |
| 220-240VAC                       |
| POWER                            |
| 10W                              |
| CCT                              |
| 2700K, 3000K, 4000K, 6000K, 3CCT |
| IP                               |
| 65                               |



600 400



|                       |                                         |
|-----------------------|-----------------------------------------|
| COVER                 | Aluminium                               |
| LAMP BODY             | Aluminium                               |
|                       | UV textured powder coated T=60-90µm     |
| OPERATION TEMPERATURE | -20°C-40°C                              |
| DIMMING SUPPORT       | Dali, 1-10V, Phase Cut, Triac Available |





600 401

| MATERIAL                         |
|----------------------------------|
| AL                               |
| INPUT VOLTAGE                    |
| 220-240VAC                       |
| POWER                            |
| 30W                              |
| CCT                              |
| 2700K, 3000K, 4000K, 6000K, 3CCT |
| IP                               |
| 65                               |



600 401

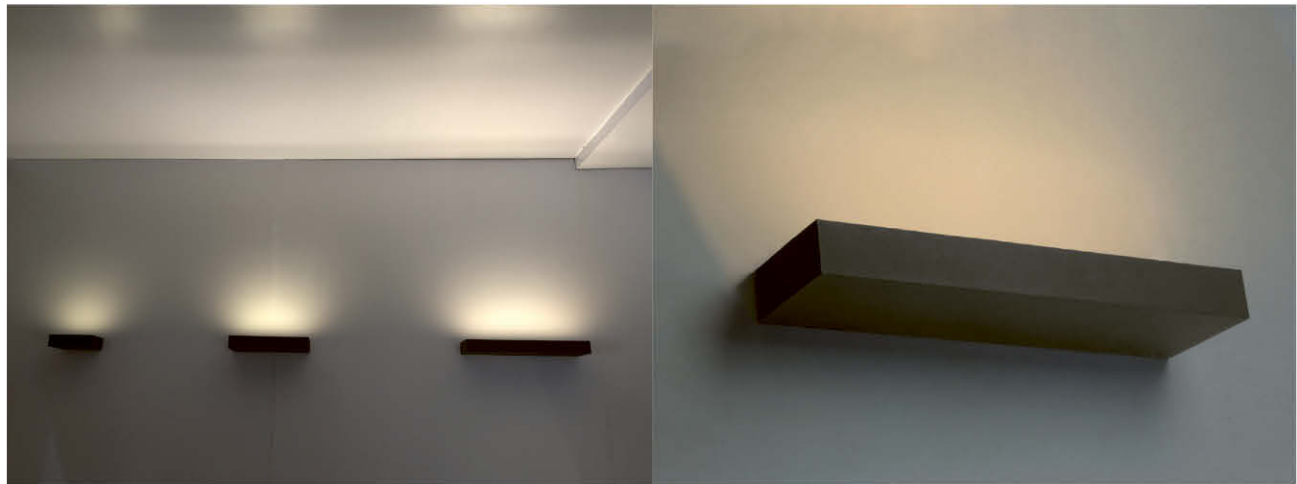


600 402


| MATERIAL                         |
|----------------------------------|
| AL                               |
| INPUT VOLTAGE                    |
| 220-240VAC                       |
| POWER                            |
| 40W                              |
| CCT                              |
| 2700K, 3000K, 4000K, 6000K, 3CCT |
| IP                               |
| 65                               |




600 402




PHOTOMETRICS

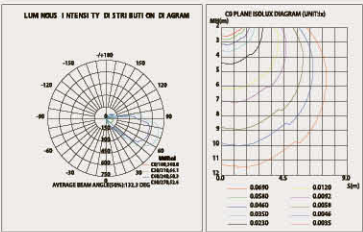

600 400

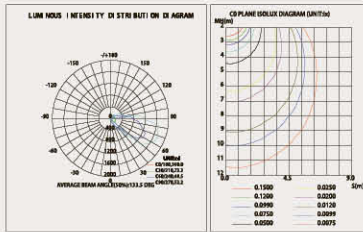

600 401

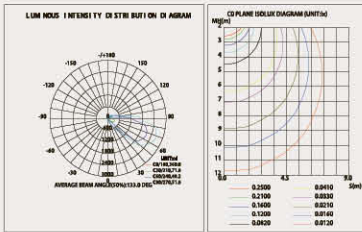

600 402





Wall Light



600 403

|                            |
|----------------------------|
| <b>MATERIAL</b>            |
| SS316, AL, Brass, Copper   |
| <b>INPUT VOLTAGE</b>       |
| 220-240VAC                 |
| <b>POWER</b>               |
| 7W                         |
| <b>CCT</b>                 |
| 2700K, 3000K, 4000K, 6000K |
| <b>IP</b>                  |
| 65                         |




600 403



600 404



600 405



600 406

|                            |
|----------------------------|
| <b>MATERIAL</b>            |
| SS316, AL, Brass, Copper   |
| <b>INPUT VOLTAGE</b>       |
| 220-240VAC                 |
| <b>POWER</b>               |
| 2x6W                       |
| <b>CCT</b>                 |
| 2700K, 3000K, 4000K, 6000K |
| <b>IP</b>                  |
| 65                         |




600 406



600 407



600 408



600 409

|                            |
|----------------------------|
| <b>MATERIAL</b>            |
| SS316, AL, Brass, Copper   |
| <b>INPUT VOLTAGE</b>       |
| 220-240VAC                 |
| <b>POWER</b>               |
| 7W                         |
| <b>CCT</b>                 |
| 2700K, 3000K, 4000K, 6000K |
| <b>IP</b>                  |
| 65                         |




600 409



600 410



600 411



LAMP BODY

SS316, AL, Brass, Copper

OPERATION TEMPERATURE

UV textured powder coated T=60-90µm


DIMMING SUPPORT

-20°C-40°C


Dali, 1-10V, Phase Cut, Triac Available



PHOTOMETRICS

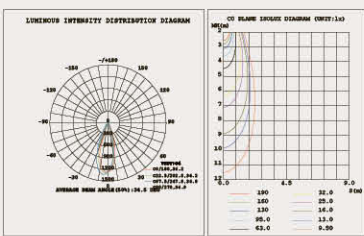

600 403/404/405/409/410/411

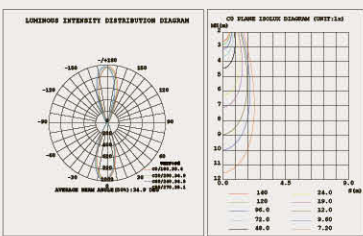

600 406/407/408






Wall Light



600 412

|                            |    |
|----------------------------|----|
| MATERIAL                   |    |
| AL                         |    |
| INPUT VOLTAGE              |    |
| 220-240VAC                 |    |
| POWER                      |    |
| 7W / Match GU10 bulb       |    |
| CCT                        |    |
| 2700K, 3000K, 4000K, 6000K |    |
| IK                         | IP |
| 04                         | 65 |




|                         |                                     |
|-------------------------|-------------------------------------|
| LAMP BODY               | Aluminium                           |
|                         | UV textured powder coated T=60-90µm |
| OPERATION TEMPERATURE   | -20°C-40°C                          |
| DIMMING SUPPORT         | Triac Available                     |
| LIGHTING SOURCES OPTION | GU10 bulb                           |




600 413

|                            |    |
|----------------------------|----|
| MATERIAL                   |    |
| AL                         |    |
| INPUT VOLTAGE              |    |
| 220-240VAC                 |    |
| POWER                      |    |
| 2x7W / Match GU10 bulb     |    |
| CCT                        |    |
| 2700K, 3000K, 4000K, 6000K |    |
| IK                         | IP |
| 04                         | 65 |




600 414

|                            |    |
|----------------------------|----|
| MATERIAL                   |    |
| AL                         |    |
| INPUT VOLTAGE              |    |
| 220-240VAC                 |    |
| POWER                      |    |
| 7W / Match GU10 bulb       |    |
| CCT                        |    |
| 2700K, 3000K, 4000K, 6000K |    |
| IK                         | IP |
| 04                         | 65 |




600 415

|                            |    |
|----------------------------|----|
| MATERIAL                   |    |
| AL                         |    |
| INPUT VOLTAGE              |    |
| 220-240VAC                 |    |
| POWER                      |    |
| 2x7W / Match GU10 bulb     |    |
| CCT                        |    |
| 2700K, 3000K, 4000K, 6000K |    |
| IK                         | IP |
| 04                         | 65 |



PHOTOMETRICS

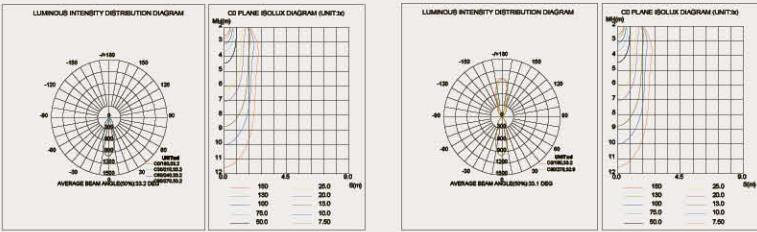

600 412/414

600 413/415






Wall Light




600 416

|                            |
|----------------------------|
| <b>MATERIAL</b>            |
| AL                         |
| <b>INPUT VOLTAGE</b>       |
| 220-240VAC                 |
| <b>POWER</b>               |
| 7W                         |
| <b>CCT</b>                 |
| 2700K, 3000K, 4000K, 6000K |
| <b>IP</b>                  |
| 65                         |






600 417



|                       |                                     |
|-----------------------|-------------------------------------|
| COVER                 | Aluminium                           |
| LAMP BODY             | Aluminium                           |
|                       | UV textured powder coated T=60-90µm |
| OPERATION TEMPERATURE | -20°C-40°C                          |
| DIMMING SUPPORT       | Triac Available                     |

ADJUSTABLE

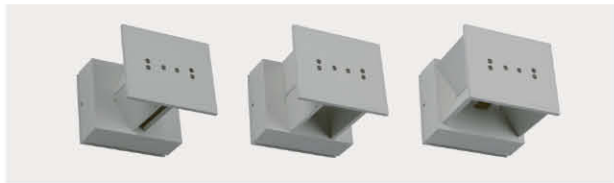


REPLACEABLE ACCESSORY





600 418

|                            |
|----------------------------|
| <b>MATERIAL</b>            |
| AL                         |
| <b>INPUT VOLTAGE</b>       |
| 220-240VAC                 |
| <b>POWER</b>               |
| 11W                        |
| <b>CCT</b>                 |
| 2700K, 3000K, 4000K, 6000K |
| <b>IP</b>                  |
| 65                         |




600 419

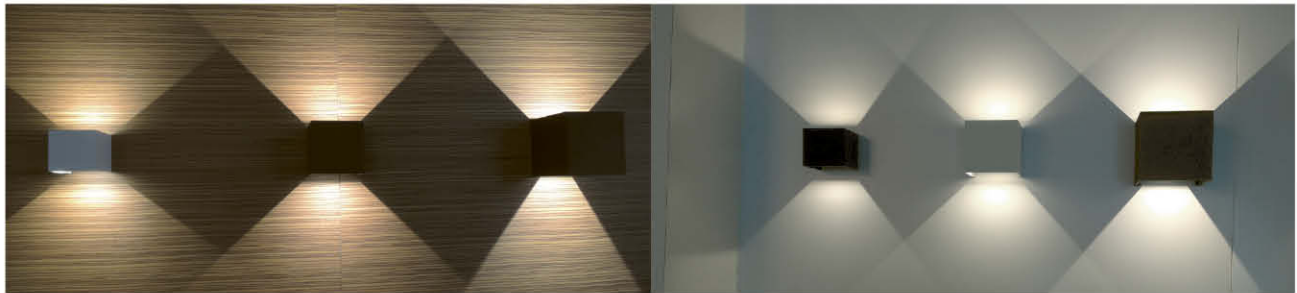


600 420


|                            |
|----------------------------|
| <b>MATERIAL</b>            |
| AL                         |
| <b>INPUT VOLTAGE</b>       |
| 220-240VAC                 |
| <b>POWER</b>               |
| 18W                        |
| <b>CCT</b>                 |
| 2700K, 3000K, 4000K, 6000K |
| <b>IP</b>                  |
| 65                         |



600 421



PHOTOMETRICS

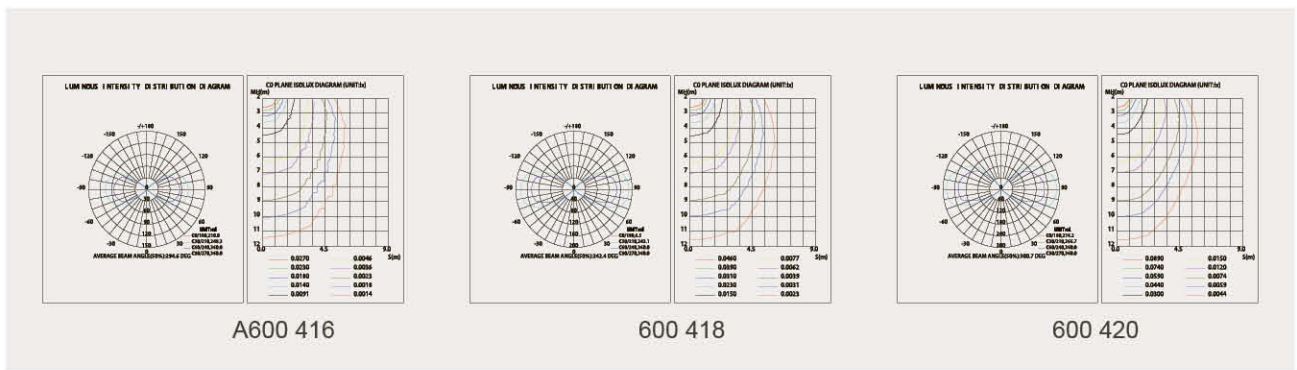




Wall Light



600 412

| MATERIAL                   |
|----------------------------|
| AL                         |
| INPUT VOLTAGE              |
| 220-240VAC                 |
| POWER                      |
| 6W                         |
| CCT                        |
| 2700K, 3000K, 4000K, 6000K |
| IP                         |
| 65                         |





|                       |                                     |
|-----------------------|-------------------------------------|
| LAMP BODY             | Aluminium                           |
|                       | UV textured powder coated T=60-90µm |
| OPERATION TEMPERATURE | -20°C-40°C                          |
| DIMMING SUPPORT       | Triac Available                     |




600 422

| MATERIAL                   |
|----------------------------|
| AL                         |
| INPUT VOLTAGE              |
| 220-240VAC                 |
| POWER                      |
| 10W                        |
| CCT                        |
| 2700K, 3000K, 4000K, 6000K |
| IP                         |
| 65                         |

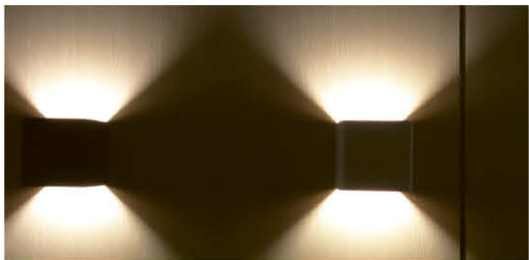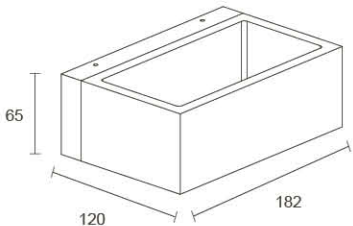


600 423


| MATERIAL                   |
|----------------------------|
| AL                         |
| INPUT VOLTAGE              |
| 220-240VAC                 |
| POWER                      |
| 6W                         |
| CCT                        |
| 2700K, 3000K, 4000K, 6000K |
| IP                         |
| 20                         |



PHOTOMETRICS

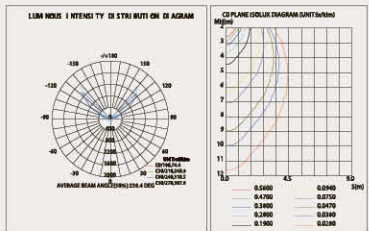

600 421

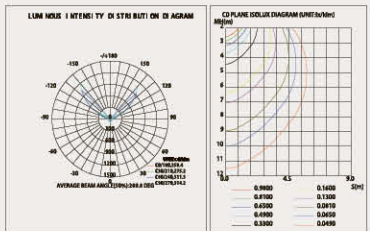

600 422






Wall Light




600 423

| MATERIAL                   |
|----------------------------|
| AL                         |
| INPUT VOLTAGE              |
| 220-240VAC                 |
| POWER                      |
| 2x3W                       |
| CCT                        |
| 2700K, 3000K, 4000K, 6000K |
| IP                         |
| 65                         |




600 424

| MATERIAL                   |
|----------------------------|
| AL                         |
| INPUT VOLTAGE              |
| 220-240VAC                 |
| POWER                      |
| 2x6W                       |
| CCT                        |
| 2700K, 3000K, 4000K, 6000K |
| IP                         |
| 65                         |




600 425

| MATERIAL                   |
|----------------------------|
| AL                         |
| INPUT VOLTAGE              |
| 220-240VAC                 |
| POWER                      |
| 2x9W                       |
| CCT                        |
| 2700K, 3000K, 4000K, 6000K |
| IP                         |
| 65                         |

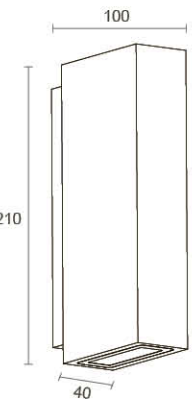


600 426


| MATERIAL                         |
|----------------------------------|
| AL                               |
| INPUT VOLTAGE                    |
| 220-240VAC                       |
| POWER                            |
| 6W                               |
| CCT                              |
| 2700K, 3000K, 4000K, 6000K, 2CCT |
| CRI                              |
| 80                               |
| IP                               |
| 65                               |



|                       |                                     |
|-----------------------|-------------------------------------|
| COVER                 | Aluminium                           |
| LAMP BODY             | Aluminium                           |
|                       | UV textured powder coated T=60-90µm |
| Operation Temperature | -20°C-40°C                          |
| Dimming Support       | Triac Available                     |

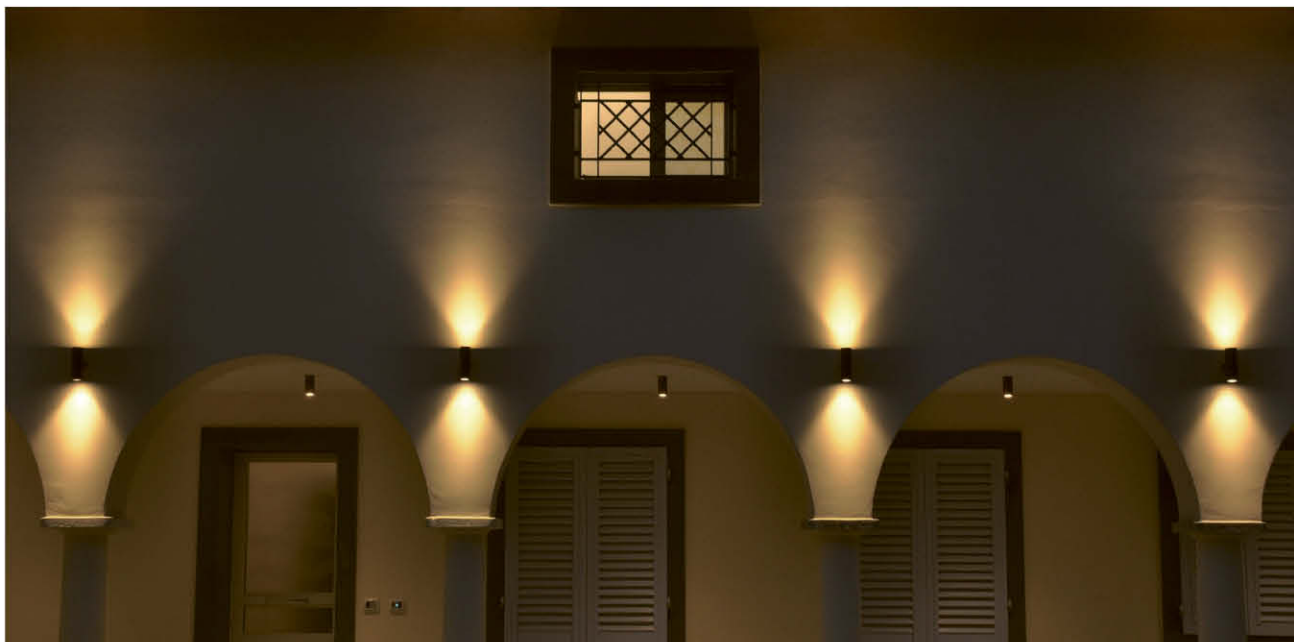

PHOTOMETRICS

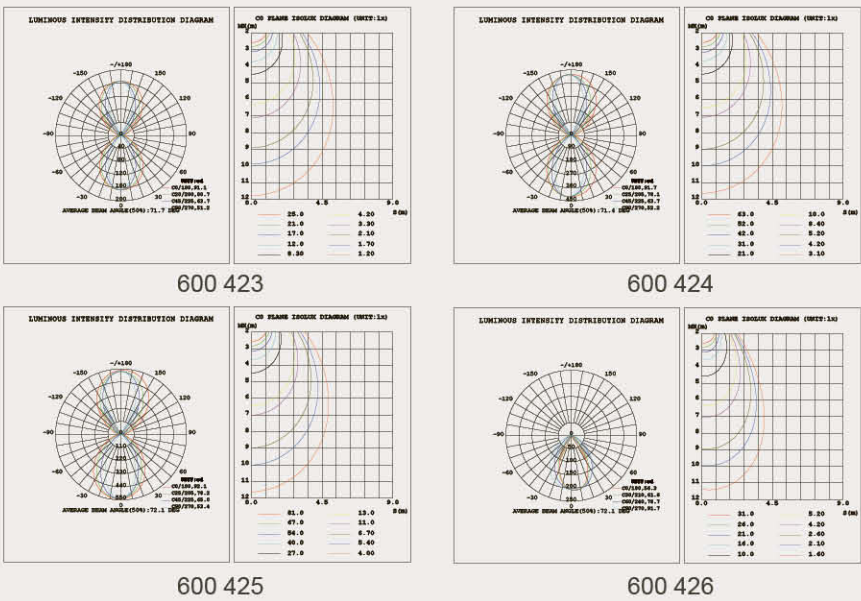


Wall Light




600 427

|                            |
|----------------------------|
| <b>MATERIAL</b>            |
| AL                         |
| <b>INPUT VOLTAGE</b>       |
| 220-240VAC                 |
| <b>POWER</b>               |
| 9W                         |
| <b>CCT</b>                 |
| 2700K, 3000K, 4000K, 6000K |
| <b>IP</b>                  |
| 65                         |

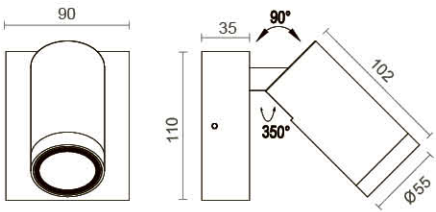


600 428

|                            |
|----------------------------|
| <b>MATERIAL</b>            |
| AL                         |
| <b>INPUT VOLTAGE</b>       |
| 220-240VAC                 |
| <b>POWER</b>               |
| 2x9W                       |
| <b>CCT</b>                 |
| 2700K, 3000K, 4000K, 6000K |
| <b>IP</b>                  |
| 65                         |

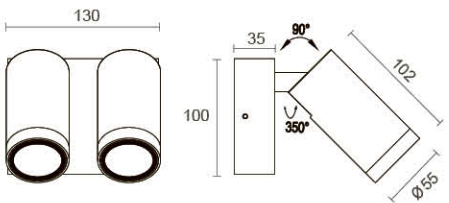


600 429

|                            |
|----------------------------|
| <b>MATERIAL</b>            |
| AL                         |
| <b>INPUT VOLTAGE</b>       |
| 220-240VAC                 |
| <b>POWER</b>               |
| 9W                         |
| <b>CCT</b>                 |
| 2700K, 3000K, 4000K, 6000K |
| <b>IP</b>                  |
| 65                         |

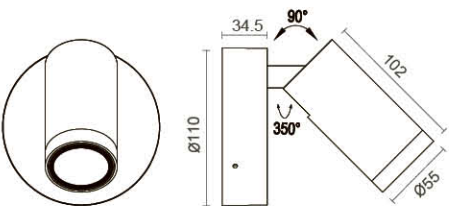

600 430


|                            |
|----------------------------|
| <b>MATERIAL</b>            |
| AL                         |
| <b>INPUT VOLTAGE</b>       |
| 220-240VAC                 |
| <b>POWER</b>               |
| 2x9W                       |
| <b>CCT</b>                 |
| 2700K, 3000K, 4000K, 6000K |
| <b>IP</b>                  |
| 65                         |

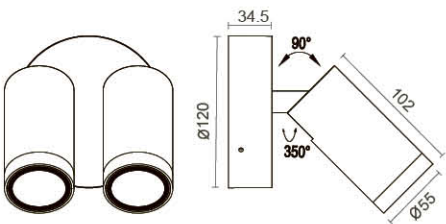


|                       |                                     |
|-----------------------|-------------------------------------|
| Cover                 | Aluminium                           |
| Lamp Body             | Aluminium                           |
|                       | UV textured powder coated T=60-90µm |
| Operation Temperature | -20°C-40°C                          |
| Dimming Support       | Triac Available                     |

OPTICS

15° 24° 36°

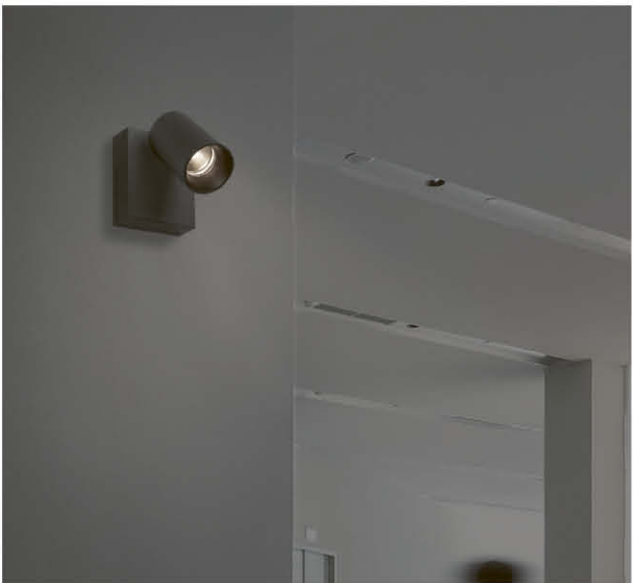

PHOTOMETRICS

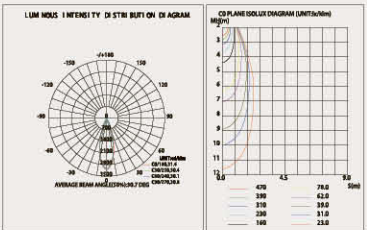




Sensor Wall Light




600 431

|                            |
|----------------------------|
| <b>MATERIAL</b>            |
| AL                         |
| <b>INPUT VOLTAGE</b>       |
| 220-240VAC                 |
| <b>POWER</b>               |
| 9W                         |
| <b>CCT</b>                 |
| 2700K, 3000K, 4000K, 6000K |
| <b>IP</b>                  |
| 65                         |

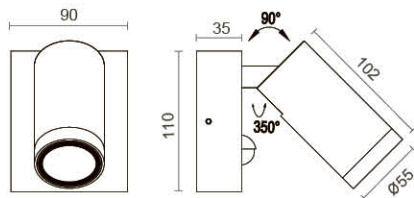


600 432

|                            |
|----------------------------|
| <b>MATERIAL</b>            |
| AL                         |
| <b>INPUT VOLTAGE</b>       |
| 220-240VAC                 |
| <b>POWER</b>               |
| 2x9W                       |
| <b>CCT</b>                 |
| 2700K, 3000K, 4000K, 6000K |
| <b>IP</b>                  |
| 65                         |

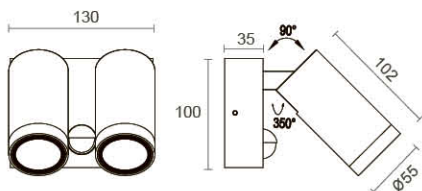


600 433

|                            |
|----------------------------|
| <b>MATERIAL</b>            |
| AL                         |
| <b>INPUT VOLTAGE</b>       |
| 220-240VAC                 |
| <b>POWER</b>               |
| 9W                         |
| <b>CCT</b>                 |
| 2700K, 3000K, 4000K, 6000K |
| <b>IP</b>                  |
| 65                         |

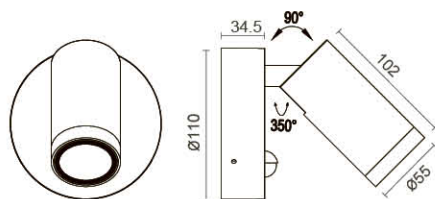

600 434

|                            |
|----------------------------|
| <b>MATERIAL</b>            |
| AL                         |
| <b>INPUT VOLTAGE</b>       |
| 220-240VAC                 |
| <b>POWER</b>               |
| 2x9W                       |
| <b>CCT</b>                 |
| 2700K, 3000K, 4000K, 6000K |
| <b>IP</b>                  |
| 65                         |

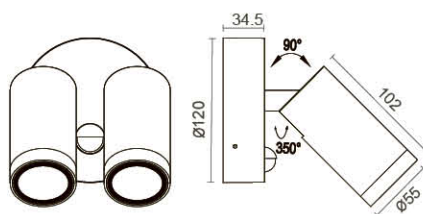

|                       |                                                  |
|-----------------------|--------------------------------------------------|
| LAMP BODY             | Aluminium<br>UV textured powder coated T=60-90µm |
| OPERATION TEMPERATURE | -20°C-40°C                                       |
| DIMMING SUPPORT       | Triac Available                                  |

SPECIFICATION:

|                                        |                                       |
|----------------------------------------|---------------------------------------|
| PRINCIPLE                              | PASSIVE INFRARED DETECTION            |
| RATED VOLTAGE                          | 220-240VAC/ 50HZ                      |
| PIR POWER CONSUMPTION                  | ≤1.0W                                 |
| DETECTION RANGE&ANGLE                  | 120°(@25°C, 85%RH, INSTALL HEIGHT:2M) |
| DETECTION DISTANCE                     | MAX 10M (RECOMMEND 8M)                |
| RATED LOAD                             | MAX:50W LED                           |
| LUX ADJUSTMENT                         | 3 - 1000LUX                           |
| TIME ADJUSTMENT                        | 8S±5S - 12MIN±2MIN                    |
| INSTALLATION HEIGHT                    | RECOMMEND 2 ~ 2.5M                    |
| BLOCKING TIME                          | 3±0.5SEC                              |
| WARM UP TIME                           | ABOUT 30±10 SEC                       |
| "OPERATING TEMPERATURE RANGE&HUMIDITY" | -10°C ~ 40°C/ 85%RH                   |
| WARM UP TIME                           | 35 SECS ± 5 SECS                      |


OPTICS

15° 24° 36°


ROTATE SHIELD TO UNCOVER  
SENSOR ADJUSTMENT DIALS.



SENSOR EFFECT:

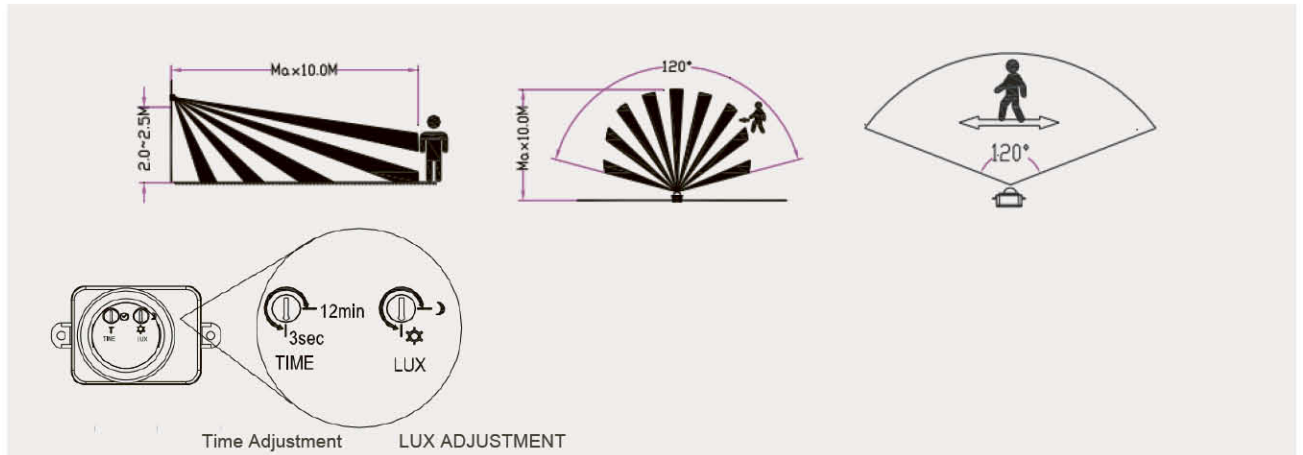

PHOTOMETRICS

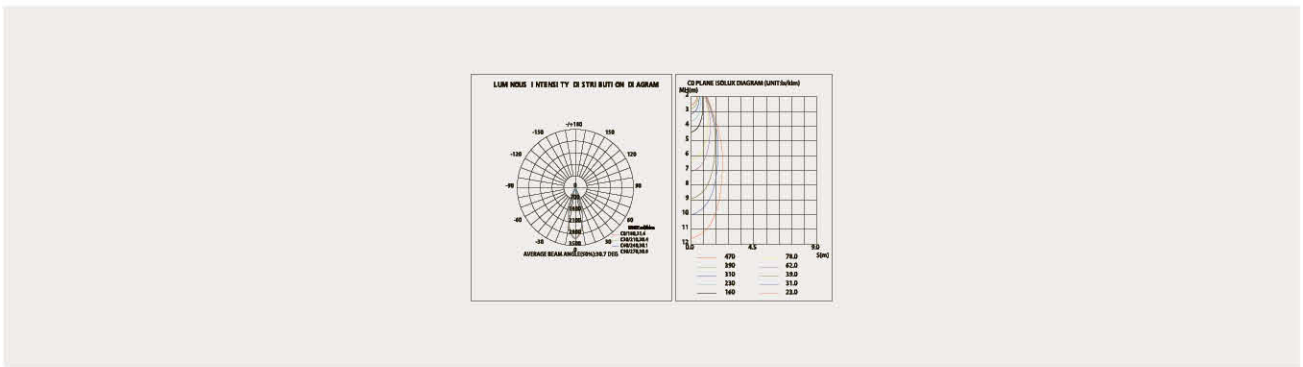




Recessed Step Light



600 500

| MATERIAL                                            |    |
|-----------------------------------------------------|----|
| SS316                                               |    |
| INPUT VOLTAGE                                       |    |
| AC/DC12V, DC24V                                     |    |
| POWER                                               |    |
| 1.2W                                                |    |
| CCT                                                 |    |
| 2700K, 3000K, 4000K, 6000K, Red, Green, Blue, Amber |    |
| IK                                                  |    |
| 10                                                  | IP |
|                                                     | 67 |




600 501


| MATERIAL                                            |    |
|-----------------------------------------------------|----|
| SS316                                               |    |
| INPUT VOLTAGE                                       |    |
| AC/DC12V, DC24V                                     |    |
| POWER                                               |    |
| 2W                                                  |    |
| CCT                                                 |    |
| 2700K, 3000K, 4000K, 6000K, Red, Green, Blue, Amber |    |
| IK                                                  |    |
| 10                                                  | IP |
|                                                     | 67 |



|                       |                             |
|-----------------------|-----------------------------|
| FRONT COVER           | Brushed 316 stainless steel |
| LAMP BODY             | Brushed 316 stainless steel |
| POWER CABLE           | H05RN-F rubber cable        |
| OPERATION TEMPERATURE | -20°C-40°C                  |



Wall Mounting

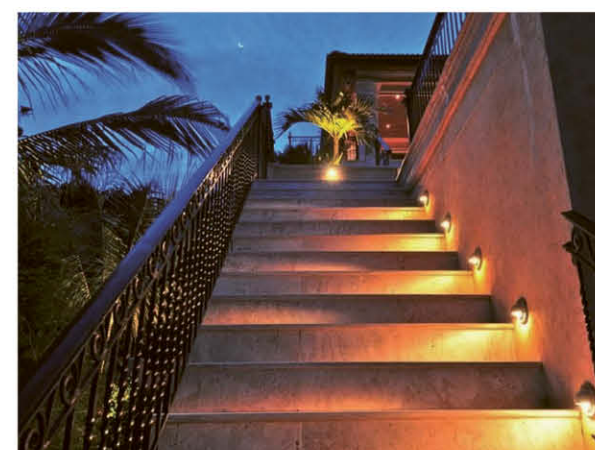


30mm




34mm



PHOTOMETRICS

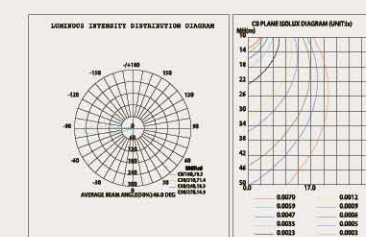

600 500

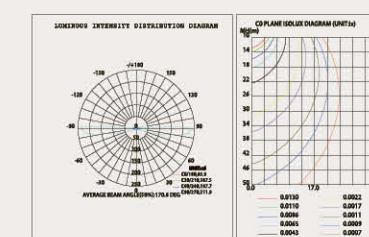

600 501





Recessed Step Light



600 502

| MATERIAL                   |    |
|----------------------------|----|
| AL                         |    |
| INPUT VOLTAGE              |    |
| DC12V, DC24V, 220-240VAC   |    |
| POWER                      |    |
| 1.5W                       |    |
| CCT                        |    |
| 2700K, 3000K, 4000K, 6000K |    |
| IK                         | IP |
| 10                         | 65 |





600 503


| MATERIAL                   |    |
|----------------------------|----|
| AL                         |    |
| INPUT VOLTAGE              |    |
| DC12V, DC24V, 220-240VAC   |    |
| POWER                      |    |
| 1.5W                       |    |
| CCT                        |    |
| 2700K, 3000K, 4000K, 6000K |    |
| IK                         | IP |
| 10                         | 65 |



|                       |                                     |
|-----------------------|-------------------------------------|
| FRONT COVER           | Aluminium                           |
| LAMP BODY             | Aluminium                           |
|                       | UV textured powder coated T=60-90µm |
| POWER CABLE           | H05RN-F rubber cable                |
| OPERATION TEMPERATURE | -20°C-40°C                          |

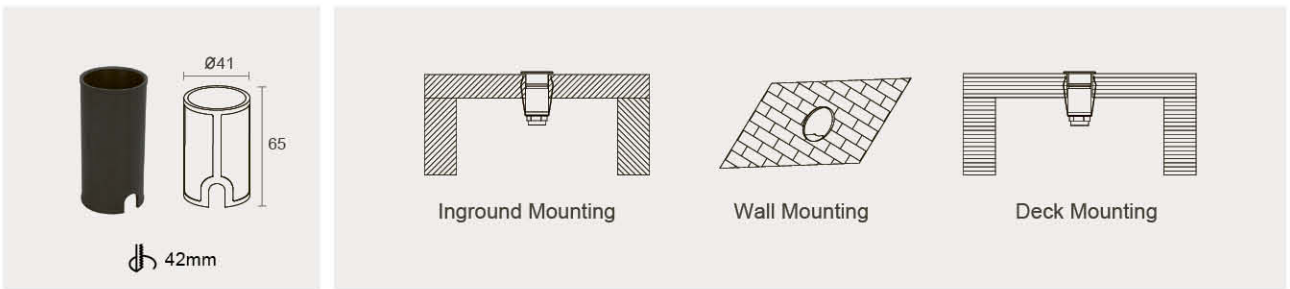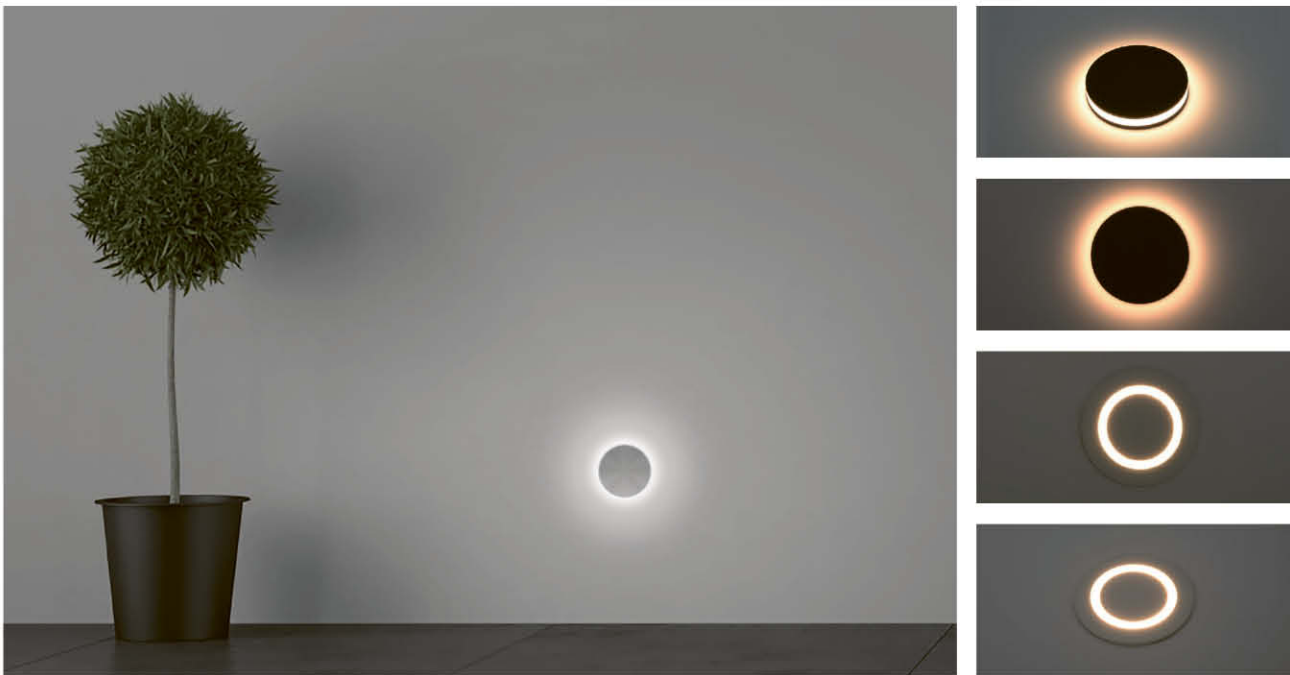

PHOTOMETRICS

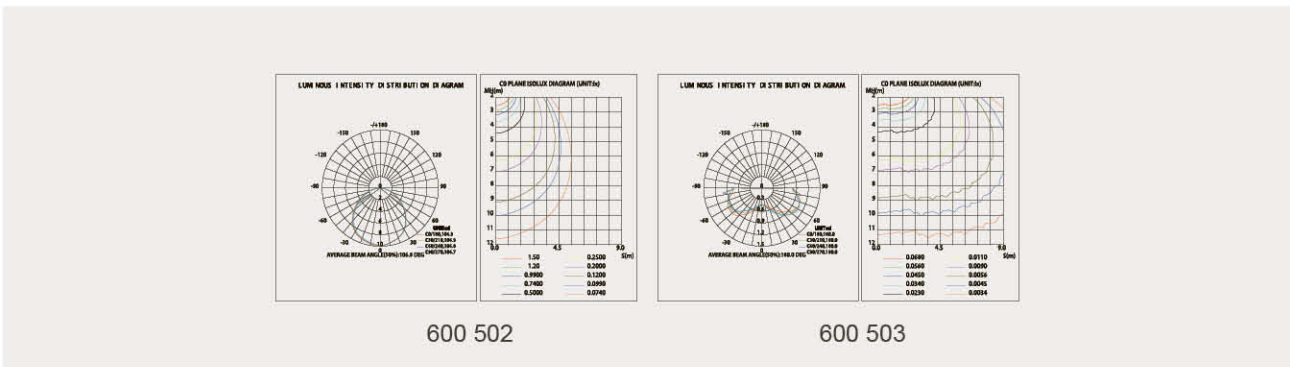



Recessed Step Light



600 504


| MATERIAL                         |    |
|----------------------------------|----|
| AL, SS316, Brass, Copper         |    |
| INPUT VOLTAGE                    |    |
| AC/DC12V, DC24V                  |    |
| POWER                            |    |
| 1W                               |    |
| CCT                              |    |
| 2700K, 3000K, 4000K, 6000K, 3CCT |    |
| IK                               | IP |
| 10                               | 67 |



600 504



600 505



600 506



600 507



600 508


| MATERIAL                         |    |
|----------------------------------|----|
| AL, SS316, Brass, Copper         |    |
| INPUT VOLTAGE                    |    |
| AC/DC12V, DC24V                  |    |
| POWER                            |    |
| 1W                               |    |
| CCT                              |    |
| 2700K, 3000K, 4000K, 6000K, 3CCT |    |
| IK                               | IP |
| 10                               | 67 |



600 508



600 509



600 510



600 511



600 513


| MATERIAL                         |    |
|----------------------------------|----|
| AL, SS316, Brass, Copper         |    |
| INPUT VOLTAGE                    |    |
| AC/DC12V, DC24V                  |    |
| POWER                            |    |
| 3W                               |    |
| CCT                              |    |
| 2700K, 3000K, 4000K, 6000K, 3CCT |    |
| IK                               | IP |
| 10                               | 67 |



600 512



600 513



600 514



600 515



600 517


| MATERIAL                         |    |
|----------------------------------|----|
| AL, SS316, Brass, Copper         |    |
| INPUT VOLTAGE                    |    |
| AC/DC12V, DC24V                  |    |
| POWER                            |    |
| 3W                               |    |
| CCT                              |    |
| 2700K, 3000K, 4000K, 6000K, 3CCT |    |
| IK                               | IP |
| 10                               | 67 |



600 516



600 517



600 518




600 519

LAMP BODY


316 Stainless steel

OPERATION TEMPERATURE

Aluminium (UV textured powder coated T=60-90µm)  
-20°C-40°C



Wall Mounting

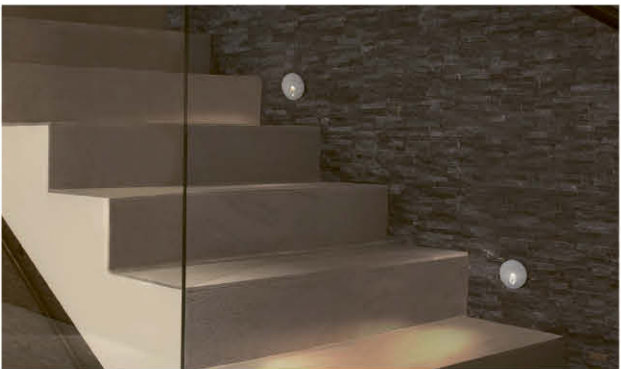

51mm



F-1012 / F-1013 Canister



78mm

F-1001 / F-1002 Canister

PHOTOMETRICS

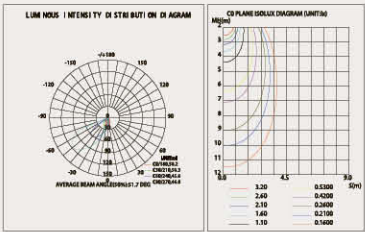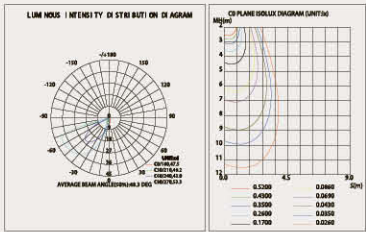


Recessed Step Light




600 520

| MATERIAL                   |    |
|----------------------------|----|
| AL                         |    |
| INPUT VOLTAGE              |    |
| DC24V, 220-240VAC          |    |
| POWER                      |    |
| 3W, 5W                     |    |
| CCT                        |    |
| 2700K, 3000K, 4000K, 6000K |    |
| IK                         | IP |
| 10                         | 65 |




600 521

| MATERIAL                   |    |
|----------------------------|----|
| AL                         |    |
| INPUT VOLTAGE              |    |
| DC24V, 220-240VAC          |    |
| POWER                      |    |
| 3W, 5W                     |    |
| CCT                        |    |
| 2700K, 3000K, 4000K, 6000K |    |
| IK                         | IP |
| 10                         | 65 |




600 522

| MATERIAL                   |    |
|----------------------------|----|
| AL                         |    |
| INPUT VOLTAGE              |    |
| DC24V, 220-240VAC          |    |
| POWER                      |    |
| 3W, 5W                     |    |
| CCT                        |    |
| 2700K, 3000K, 4000K, 6000K |    |
| IK                         | IP |
| 10                         | 65 |



600 523

| MATERIAL                   |    |
|----------------------------|----|
| AL                         |    |
| INPUT VOLTAGE              |    |
| DC24V, 220-240VAC          |    |
| POWER                      |    |
| 3W, 5W                     |    |
| CCT                        |    |
| 2700K, 3000K, 4000K, 6000K |    |
| IK                         | IP |
| 10                         | 65 |



FRONT COVER

Aluminium


LAMP BODY

Aluminium



OPERATION TEMPERATURE

UV textured powder coated T=60-90µm


-20°C-40°C



Wall Mounting

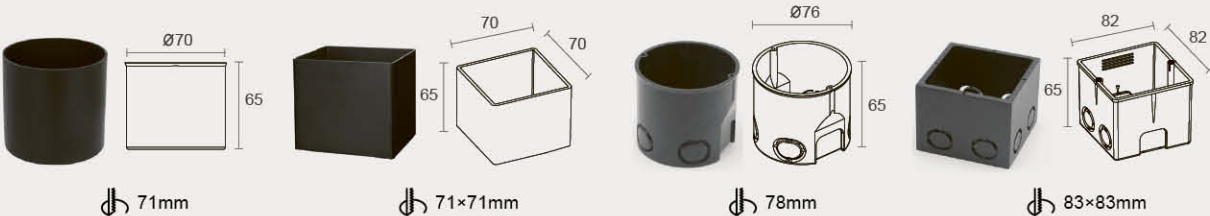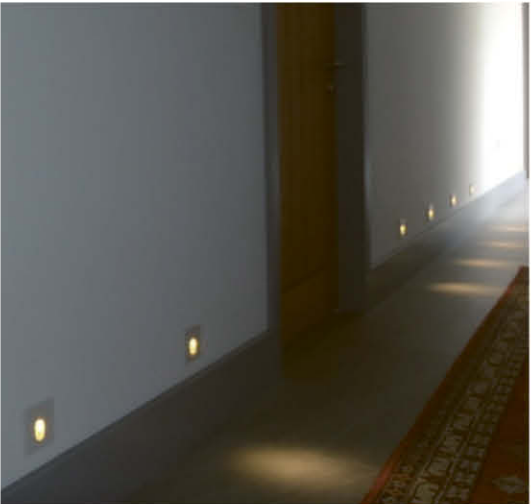

PHOTOMETRICS

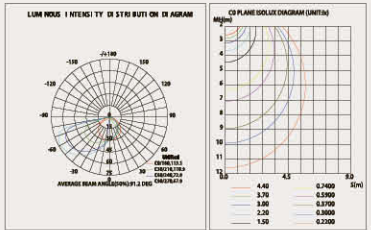



## Deck Light



600 602

|                                        |           |
|----------------------------------------|-----------|
| <b>MATERIAL</b>                        |           |
| AL, SS316+AL, SS316, BRASS, COPPER     |           |
| <b>INPUT VOLTAGE</b>                   |           |
| AC/DC12V, DC10-30V                     |           |
| <b>POWER</b>                           |           |
| 1W                                     |           |
| <b>CCT</b>                             |           |
| 2700K, 3000K, 4000K, 6000K, RGBW, 3CCT |           |
| <b>IK</b>                              | <b>IP</b> |
| 10                                     | 67        |



600 606

|                                        |           |
|----------------------------------------|-----------|
| <b>MATERIAL</b>                        |           |
| AL, SS316+AL, SS316, BRASS, COPPER     |           |
| <b>INPUT VOLTAGE</b>                   |           |
| AC/DC12V, DC10-30V                     |           |
| <b>POWER</b>                           |           |
| 1W                                     |           |
| <b>CCT</b>                             |           |
| 2700K, 3000K, 4000K, 6000K, RGBW, 3CCT |           |
| <b>IK</b>                              | <b>IP</b> |
| 10                                     | 67        |



600 613

|                                        |           |
|----------------------------------------|-----------|
| <b>MATERIAL</b>                        |           |
| AL, SS316+AL, SS316, BRASS, COPPER     |           |
| <b>INPUT VOLTAGE</b>                   |           |
| AC/DC12V, DC10-30V                     |           |
| <b>POWER</b>                           |           |
| 1W                                     |           |
| <b>CCT</b>                             |           |
| 2700K, 3000K, 4000K, 6000K, RGBW, 3CCT |           |
| <b>IK</b>                              | <b>IP</b> |
| 10                                     | 67        |



## 25MM DECK LIGHT

|                       |                                                                                        |
|-----------------------|----------------------------------------------------------------------------------------|
| FRONT COVER           | Aluminium/ Brushed 316 stainless steel/ Brushed Brass / Antique Brass / Brushed Copper |
| LAMP BODY             | 316 stainless steel / Brass / Copper                                                   |
|                       | Die-casting aluminium (UV textured powder coated T=60-90µm)                            |
| GLASS                 | Tempered step glass T=4mm                                                              |
| POWER CABLE           | 20AWG 300V PVC cable                                                                   |
| OPERATION TEMPERATURE | -20°C-40°C                                                                             |
| DIMMING SUPPORT       | Triac PWM Available                                                                    |



Interchangeable front covers




Replaceable Lens




Honeycomb




Diffuser




CREE XTE2 20° 23° 36° 60°  
CREE XPE2 14° 25° 35° 60°  
Tri-color 30° 36° 41° 50°




Inground Mounting



Wall Mounting



Deck Mounting





19mm



24mm

## PHOTOMETRICS

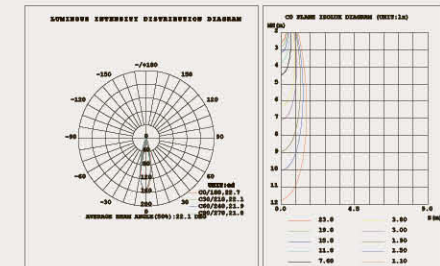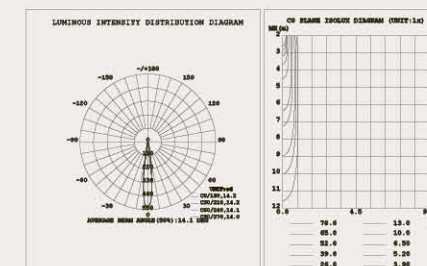



Deck Light



600 621

| MATERIAL                               |    |
|----------------------------------------|----|
| AL, SS316+AL, SS316, BRASS, COPPER     |    |
| INPUT VOLTAGE                          |    |
| AC/DC12V, DC10-30V                     |    |
| POWER                                  |    |
| 1W                                     |    |
| CCT                                    |    |
| 2700K, 3000K, 4000K, 6000K, RGBW, 3CCT |    |
| IK                                     | IP |
| 10                                     | 67 |



600 618



600 619



600 620




600 621



600 622



600 623



600 628

| MATERIAL                               |    |
|----------------------------------------|----|
| AL, SS316+AL, SS316, BRASS, COPPER     |    |
| INPUT VOLTAGE                          |    |
| AC/DC12V, DC10-30V                     |    |
| POWER                                  |    |
| 1W                                     |    |
| CCT                                    |    |
| 2700K, 3000K, 4000K, 6000K, RGBW, 3CCT |    |
| IK                                     | IP |
| 10                                     | 67 |



600 624



600 625



600 626




600 627



600 628



600 629



600 635

| MATERIAL                               |    |
|----------------------------------------|----|
| AL, SS316+AL, SS316, BRASS, COPPER     |    |
| INPUT VOLTAGE                          |    |
| AC/DC12V, DC10-30V                     |    |
| POWER                                  |    |
| 1W                                     |    |
| CCT                                    |    |
| 2700K, 3000K, 4000K, 6000K, RGBW, 3CCT |    |
| IK                                     | IP |
| 10                                     | 67 |



600 630



600 631



600 632




600 633



600 634




600 635




25MM DECK LIGHT


|                       |                                                                                        |
|-----------------------|----------------------------------------------------------------------------------------|
| FRONT COVER           | Aluminium/ Brushed 316 stainless steel/ Brushed Brass / Antique Brass / Brushed Copper |
| LAMP BODY             | 316 stainless steel / Brass / Copper                                                   |
| POWER CABLE           | Die-casting aluminium (UV textured powder coated T=60-90µm)                            |
| OPERATION TEMPERATURE | 20AWG 300V PVC cable                                                                   |
| DIMMING SUPPORT       | -20°C-40°C                                                                             |
|                       | Triac PWM Available                                                                    |




Interchangeable front covers



Inground Mounting



Wall Mounting



Deck Mounting






19mm



24mm

PHOTOMETRICS

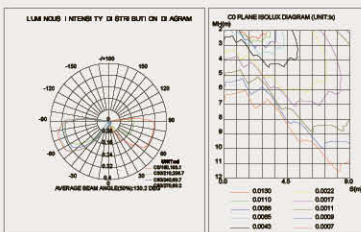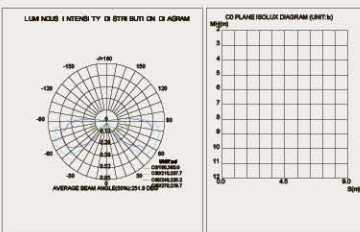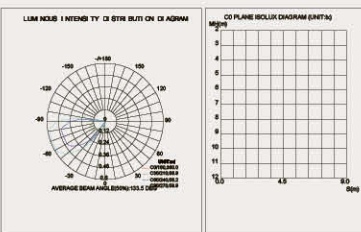



Deck Light



600 638

| MATERIAL                               |    |
|----------------------------------------|----|
| AL, SS316+AL, SS316, BRASS, COPPER     |    |
| INPUT VOLTAGE                          |    |
| AC/DC12V, DC10-30V                     |    |
| POWER                                  |    |
| 1W                                     |    |
| CCT                                    |    |
| 2700K, 3000K, 4000K, 6000K, RGBW, 3CCT |    |
| IK                                     | IP |
| 10                                     | 67 |



600 646

| MATERIAL                               |    |
|----------------------------------------|----|
| AL, SS316+AL, SS316, BRASS, COPPER     |    |
| INPUT VOLTAGE                          |    |
| AC/DC12V, DC10-30V                     |    |
| POWER                                  |    |
| 1W                                     |    |
| CCT                                    |    |
| 2700K, 3000K, 4000K, 6000K, RGBW, 3CCT |    |
| IK                                     | IP |
| 10                                     | 67 |






600 649

| MATERIAL                               |    |
|----------------------------------------|----|
| AL, SS316+AL, SS316, BRASS, COPPER     |    |
| INPUT VOLTAGE                          |    |
| AC/DC12V, DC10-30V                     |    |
| POWER                                  |    |
| 1W                                     |    |
| CCT                                    |    |
| 2700K, 3000K, 4000K, 6000K, RGBW, 3CCT |    |
| IK                                     | IP |
| 10                                     | 67 |




25MM DECK LIGHT

|                       |                                                                                        |
|-----------------------|----------------------------------------------------------------------------------------|
| FRONT COVER           | Aluminium/ Brushed 316 stainless steel/ Brushed Brass / Antique Brass / Brushed Copper |
| LAMP BODY             | Die-casting aluminium/ 316 stainless steel / Brass / Copper                            |
|                       | UV textured black powder coated T=60-90µm                                              |
| POWER CABLE           | 20AWG 300V PVC cable                                                                   |
| OPERATION TEMPERATURE | -20°C-40°C                                                                             |
| DIMMING SUPPORT       | Triac PWM Available                                                                    |

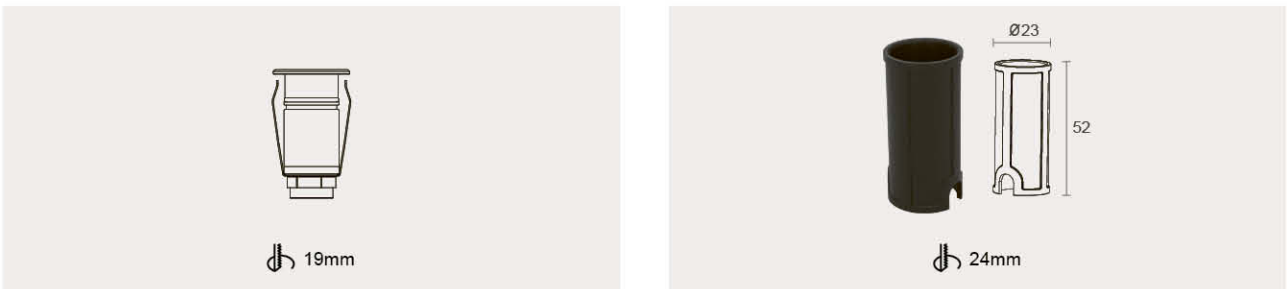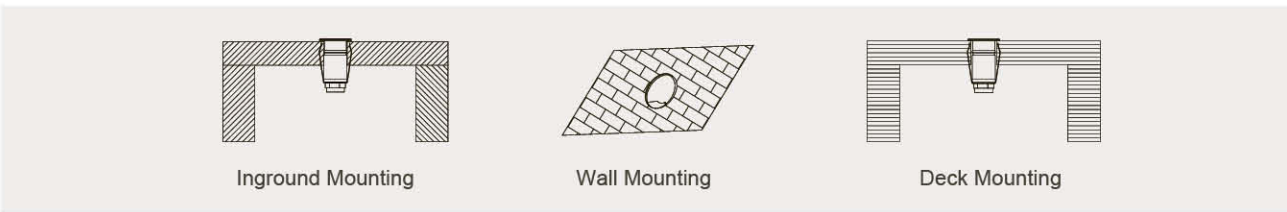

PHOTOMETRICS

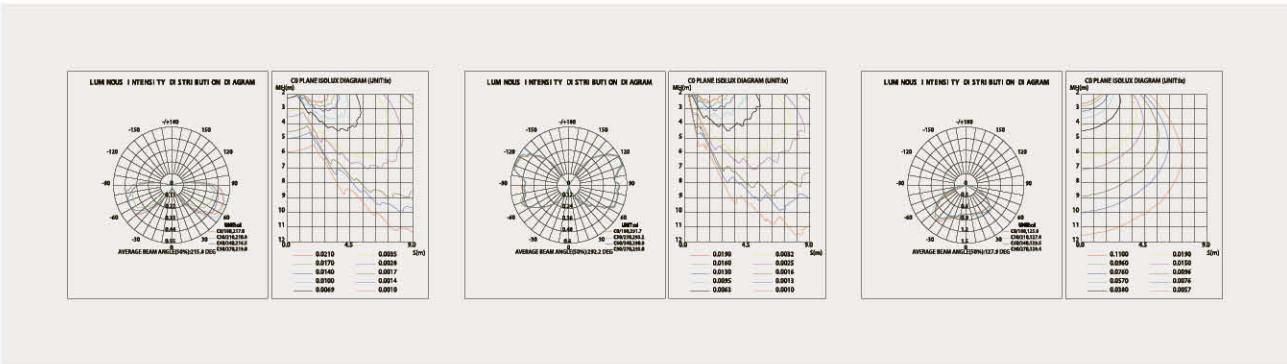




Deck Light






600 654

| MATERIAL                                |    |
|-----------------------------------------|----|
| SS316                                   |    |
| INPUT VOLTAGE                           |    |
| DC12V, DC24V                            |    |
| POWER                                   |    |
| 0.5W                                    |    |
| CCT                                     |    |
| 2700K, 3000K, 4000K, 6000K, RGBCW, 3CCT |    |
| IK                                      | IP |
| 06                                      | 67 |




600 655

| MATERIAL                               |    |
|----------------------------------------|----|
| SS316                                  |    |
| INPUT VOLTAGE                          |    |
| DC12V, DC24V                           |    |
| POWER                                  |    |
| 0.5W                                   |    |
| CCT                                    |    |
| 2700K, 3000K, 4000K, 6000K, RGCW, 3CCT |    |
| IK                                     | IP |
| 06                                     | 67 |

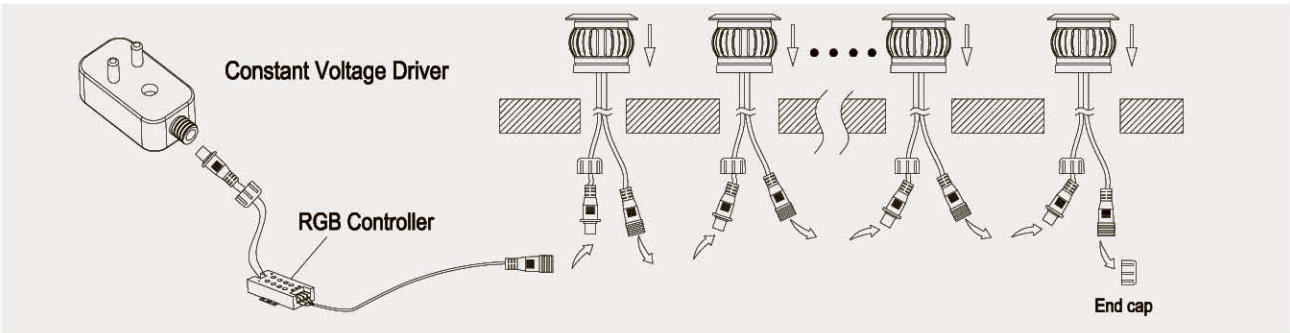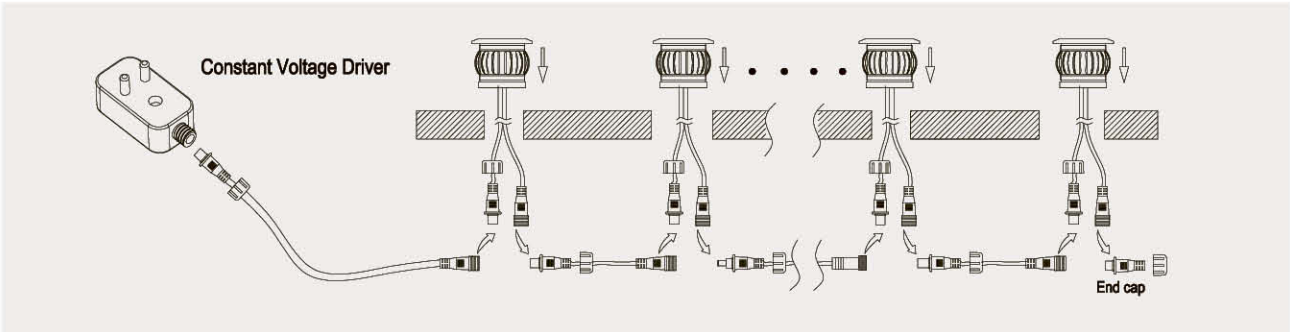


|                       |                                        |
|-----------------------|----------------------------------------|
| FRONT COVER           | Brushed 316 stainless steel            |
| LAMP BODY             | Brushed 316 stainless steel            |
| GLASS                 | Tempered glass T=1.7mm                 |
| POWER CABLE           | 2x20AWG OD4.5mm² PVC cable, 300V 80 °C |
| OPERATION TEMPERATURE | -20°C-40°C                             |


SMART SYSTEM TUYA AVAILABLE (RGBCW 3CCT)

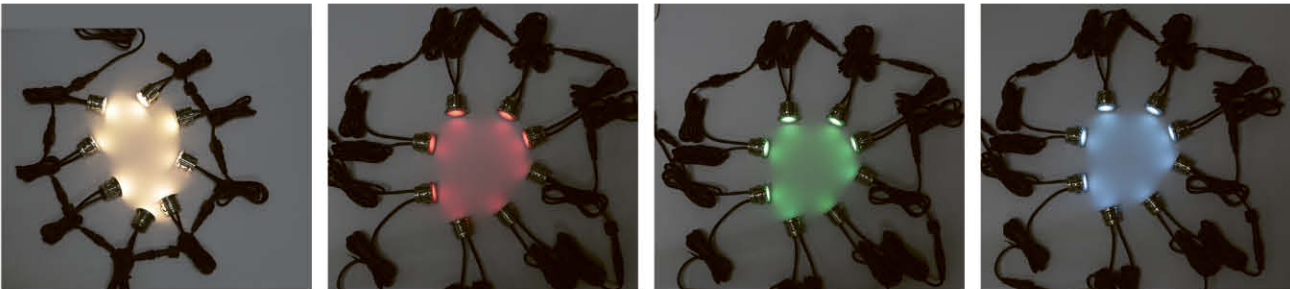

OPTIONAL ACCESSORIES



PHOTOMETRICS

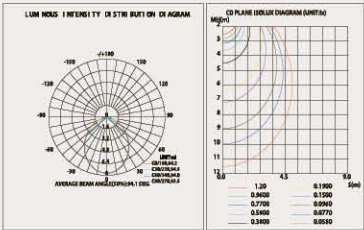



Inground Light



600 700

MATERIAL

SS316+AL

INPUT VOLTAGE

AC/DC12V, DC24V

POWER

1.5W (RGB: 3W)

CCT


2700K, 3000K, 4000K, 6000K, RGB

IK

08

IP

67



600 701

MATERIAL

SS316+AL

INPUT VOLTAGE

AC/DC12V, DC24V

POWER

1.5W (RGB: 3W)

CCT


2700K, 3000K, 4000K, 6000K, RGB

IK

08

IP

67



600 702

MATERIAL

SS316+AL

INPUT VOLTAGE

DC12V, DC24V

POWER

0.6W

CCT


2700K, 3000K, 4000K, 6000K

IK

06

IP

65



INGROUND LIGHT

FRONT COVER

Brushed 316 stainless steel

LAMP BODY

Die-casting aluminium

UV textured powder coated T=60-90µm

GLASS

Tempered step glass T=8mm (B-1068 T=4mm)

POWER CABLE


H05RN-F rubber cable

OPERATION TEMPERATURE


-20°C-40°C

OPTICS


15° 25° 40° 60°




Inground Mounting



Deck Mounting



36mm



36mm





60mm



42mm

PHOTOMETRICS

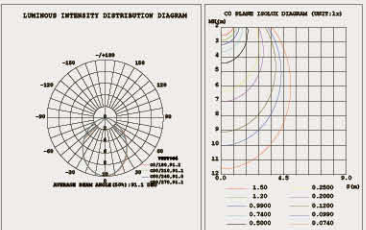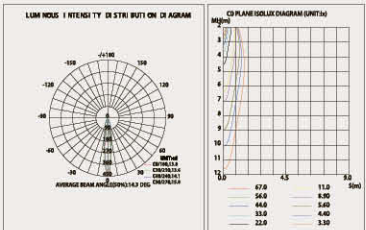




Inground Light




600 703

| MATERIAL                        |    |
|---------------------------------|----|
| SS316                           |    |
| INPUT VOLTAGE                   |    |
| AC/DC12V, DC24V                 |    |
| POWER                           |    |
| 1.5W (RGB: 3W)                  |    |
| CCT                             |    |
| 2700K, 3000K, 4000K, 6000K, RGB |    |
| IK                              | IP |
| 08                              | 67 |




600 704

| MATERIAL                        |    |
|---------------------------------|----|
| SS316                           |    |
| INPUT VOLTAGE                   |    |
| DC12V, DC24V                    |    |
| POWER                           |    |
| 2W (RGB: 3W)                    |    |
| CCT                             |    |
| 2700K, 3000K, 4000K, 6000K, RGB |    |
| IK                              | IP |
| 06                              | 67 |



600 705

| MATERIAL                        |    |
|---------------------------------|----|
| SS316                           |    |
| INPUT VOLTAGE                   |    |
| DC12V, DC24V                    |    |
| POWER                           |    |
| 4W (RGB: 6W)                    |    |
| CCT                             |    |
| 2700K, 3000K, 4000K, 6000K, RGB |    |
| IK                              | IP |
| 06                              | 67 |




INGROUND LIGHT

|                       |
|-----------------------|
| FRONT COVER           |
| LAMP BODY             |
| GLASS                 |
| POWER CABLE           |
| OPERATION TEMPERATURE |

|                             |
|-----------------------------|
| Brushed 316 stainless steel |
| Brushed 316 stainless steel |
| Tempered step glass T=8mm   |
| H05RN-F rubber cable        |
| -20°C-40°C                  |

OPTICS

|                 |
|-----------------|
| 15° 25° 40° 60° |
| 25° 40°         |
| 15° 30° 45° 60° |



Inground Mounting



33mm



45mm



59mm



60mm  
Canister




51mm  
Canister




66mm  
Canister


PHOTOMETRICS

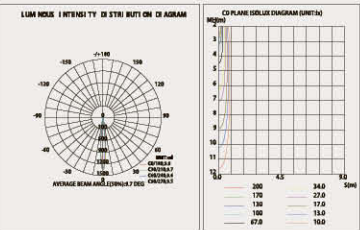


600 703

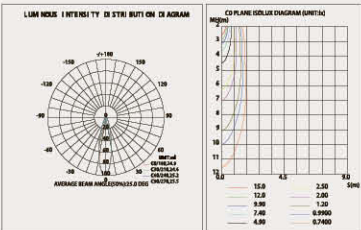

600 704

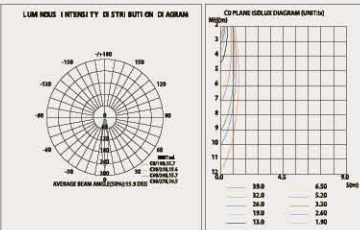

600 705





Inground Light



600 706

| MATERIAL                               |    |
|----------------------------------------|----|
| SS316+AL, SS316, BRASS, COPPER         |    |
| INPUT VOLTAGE                          |    |
| AC/DC12V, DC10-30V, 220-240VAC         |    |
| POWER                                  |    |
| 2.5W                                   |    |
| CCT                                    |    |
| 2700K, 3000K, 4000K, 6000K, RGBW, 3CCT |    |
| IK                                     | IP |
| 10                                     | 67 |



600 713

| MATERIAL                               |    |
|----------------------------------------|----|
| SS316+AL, SS316, BRASS, COPPER         |    |
| INPUT VOLTAGE                          |    |
| AC/DC12V, DC10-30V, 220-240VAC         |    |
| POWER                                  |    |
| 2.5W                                   |    |
| CCT                                    |    |
| 2700K, 3000K, 4000K, 6000K, RGBW, 3CCT |    |
| IK                                     | IP |
| 10                                     | 67 |



600 720



| MATERIAL                               |    |
|----------------------------------------|----|
| SS316+AL, SS316, BRASS, COPPER         |    |
| INPUT VOLTAGE                          |    |
| AC/DC12V, DC10-30V, 220-240VAC         |    |
| POWER                                  |    |
| 2.5W                                   |    |
| CCT                                    |    |
| 2700K, 3000K, 4000K, 6000K, RGBW, 3CCT |    |
| IK                                     | IP |
| 10                                     | 67 |




55MM INGROUND LIGHT

|                       |                                                             |
|-----------------------|-------------------------------------------------------------|
| FRONT COVER           | Brushed 316 stainless steel/ Brushed Brass / Brushed Copper |
| LAMP BODY             | 316 stainless steel / Brass / Copper                        |
|                       | Die-casting aluminium (UV textured powder coated T=60-90µm) |
| GLASS                 | Tempered step glass T=6mm                                   |
| POWER CABLE           | H05RN-F rubber cable                                        |
| OPERATION TEMPERATURE | -20°C-40°C                                                  |
| DIMMING SUPPORT       | Triac PWM Available                                         |

OPTIONAL ACCESSORIES

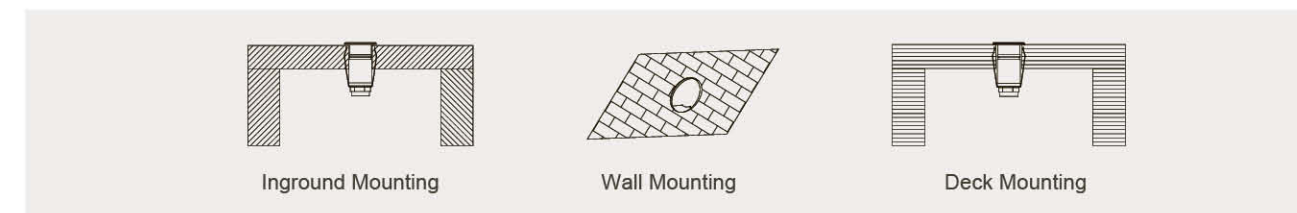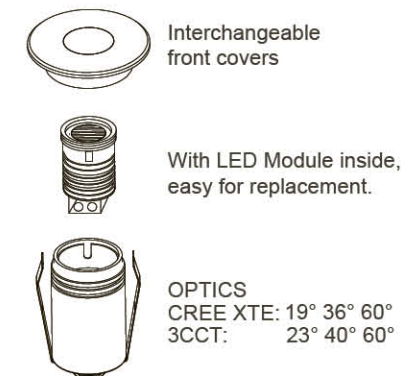

PHOTOMETRICS

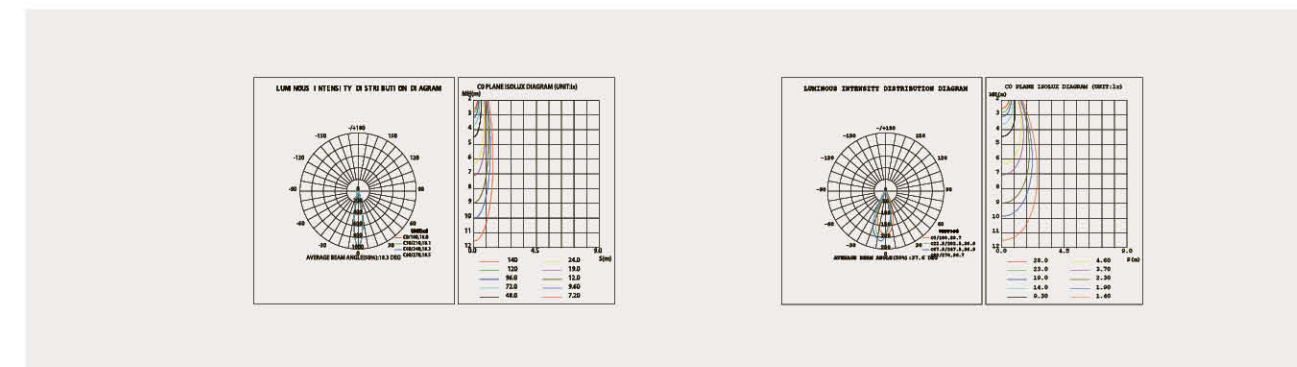



Inground Light



600 724

| MATERIAL                               |    |
|----------------------------------------|----|
| SS316+AL, SS316, BRASS, COPPER         |    |
| INPUT VOLTAGE                          |    |
| AC/DC12V, DC10-30V, 220-240VAC         |    |
| POWER                                  |    |
| 2.5W                                   |    |
| CCT                                    |    |
| 2700K, 3000K, 4000K, 6000K, RGBW, 3CCT |    |
| IK                                     | IP |
| 10                                     | 67 |



600 734

| MATERIAL                               |    |
|----------------------------------------|----|
| SS316+AL, SS316, BRASS, COPPER         |    |
| INPUT VOLTAGE                          |    |
| AC/DC12V, DC10-30V, 220-240VAC         |    |
| POWER                                  |    |
| 2.5W                                   |    |
| CCT                                    |    |
| 2700K, 3000K, 4000K, 6000K, RGBW, 3CCT |    |
| IK                                     | IP |
| 10                                     | 67 |






600 741

| MATERIAL                               |    |
|----------------------------------------|----|
| SS316+AL, SS316, BRASS, COPPER         |    |
| INPUT VOLTAGE                          |    |
| AC/DC12V, DC10-30V, 220-240VAC         |    |
| POWER                                  |    |
| 2.5W                                   |    |
| CCT                                    |    |
| 2700K, 3000K, 4000K, 6000K, RGBW, 3CCT |    |
| IK                                     | IP |
| 10                                     | 67 |




55MM INGROUND LIGHT

|                       |                                                             |
|-----------------------|-------------------------------------------------------------|
| FRONT COVER           | Brushed 316 stainless steel/ Brushed Brass / Brushed Copper |
| LAMP BODY             | 316 stainless steel / Brass / Copper                        |
|                       | Die-casting aluminium (UV textured powder coated T=60-90µm) |
| POWER CABLE           | H05RN-F rubber cable                                        |
| OPERATION TEMPERATURE | -20°C-40°C                                                  |
| DIMMING SUPPORT       | Triac PWM Available                                         |

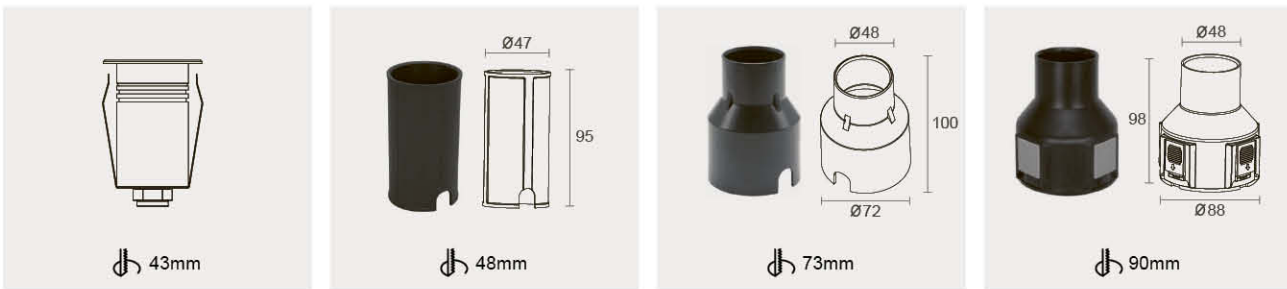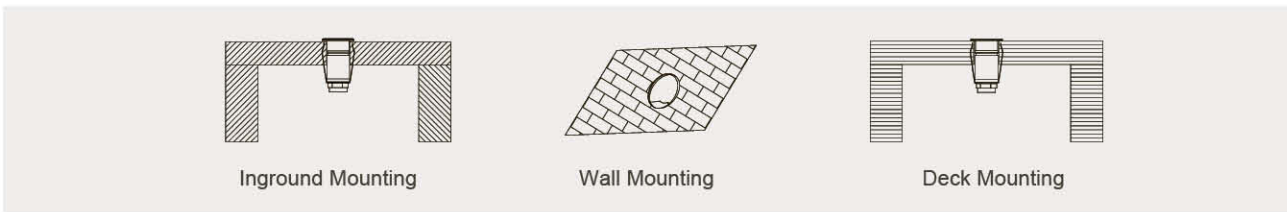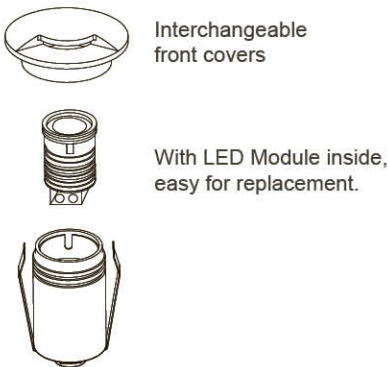

PHOTOMETRICS

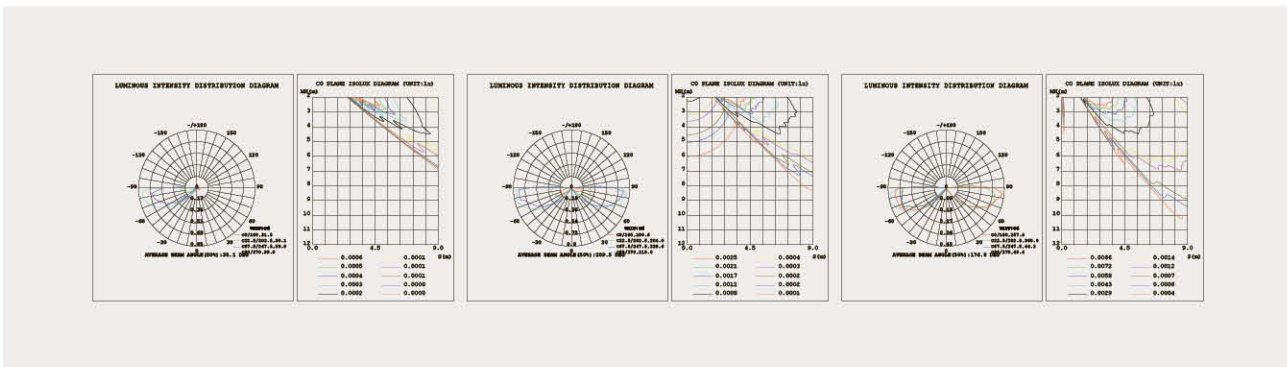



Inground Light



600 742

| MATERIAL                               |    |
|----------------------------------------|----|
| SS316+AL, SS316, BRASS, COPPER         |    |
| INPUT VOLTAGE                          |    |
| AC/DC12V, DC10-30V, 220-240VAC         |    |
| POWER                                  |    |
| 2.5W                                   |    |
| CCT                                    |    |
| 2700K, 3000K, 4000K, 6000K, RGBW, 3CCT |    |
| IK                                     | IP |
| 10                                     | 67 |



600 749

| MATERIAL                               |    |
|----------------------------------------|----|
| SS316+AL, SS316, BRASS, COPPER         |    |
| INPUT VOLTAGE                          |    |
| AC/DC12V, DC10-30V, 220-240VAC         |    |
| POWER                                  |    |
| 2.5W                                   |    |
| CCT                                    |    |
| 2700K, 3000K, 4000K, 6000K, RGBW, 3CCT |    |
| IK                                     | IP |
| 10                                     | 67 |





600 755

| MATERIAL                               |    |
|----------------------------------------|----|
| SS316+AL, SS316, BRASS, COPPER         |    |
| INPUT VOLTAGE                          |    |
| AC/DC12V, DC10-30V, 220-240VAC         |    |
| POWER                                  |    |
| 2.5W                                   |    |
| CCT                                    |    |
| 2700K, 3000K, 4000K, 6000K, RGBW, 3CCT |    |
| IK                                     | IP |
| 10                                     | 67 |




55MM INGROUND LIGHT

|                       |                                                             |
|-----------------------|-------------------------------------------------------------|
| FRONT COVER           | Brushed 316 stainless steel/ Brushed Brass / Brushed Copper |
| LAMP BODY             | 316 stainless steel / Brass / Copper                        |
|                       | Die-casting aluminium (UV textured powder coated T=60-90µm) |
| POWER CABLE           | H05RN-F rubber cable                                        |
| OPERATION TEMPERATURE | -20°C-40°C                                                  |
| DIMMING SUPPORT       | Triac PWM Available                                         |

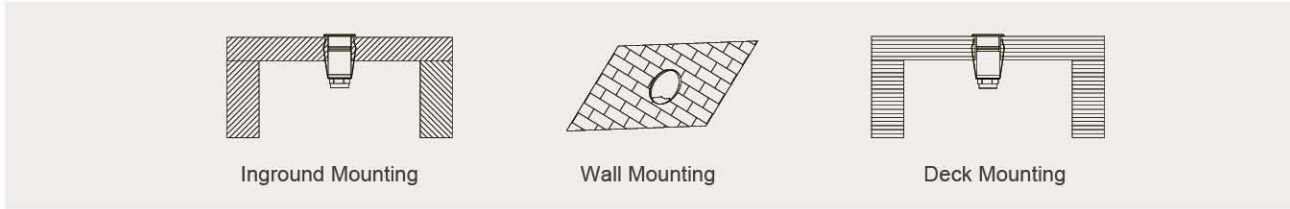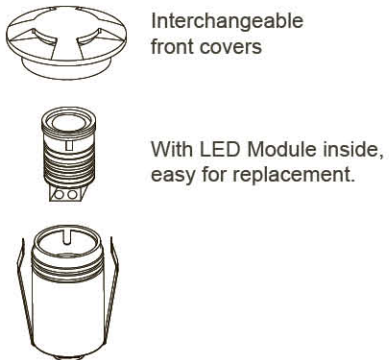

PHOTOMETRICS

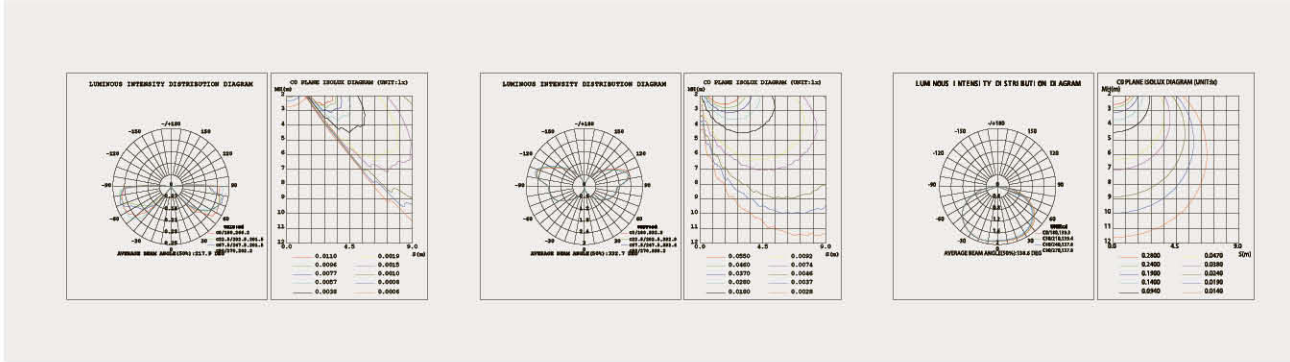



Inground Light



600 763

|                                        |           |
|----------------------------------------|-----------|
| <b>MATERIAL</b>                        |           |
| SS316+AL, SS316, BRASS, COPPER         |           |
| <b>INPUT VOLTAGE</b>                   |           |
| AC/DC12V, DC10-30V, 220-240VAC         |           |
| <b>POWER</b>                           |           |
| 2.5W                                   |           |
| <b>CCT</b>                             |           |
| 2700K, 3000K, 4000K, 6000K, RGBW, 3CCT |           |
| <b>IK</b>                              | <b>IP</b> |
| 10                                     | 67        |



600 770

|                                        |           |
|----------------------------------------|-----------|
| <b>MATERIAL</b>                        |           |
| SS316+AL, SS316, BRASS, COPPER         |           |
| <b>INPUT VOLTAGE</b>                   |           |
| AC/DC12V, DC10-30V, 220-240VAC         |           |
| <b>POWER</b>                           |           |
| 2.5W                                   |           |
| <b>CCT</b>                             |           |
| 2700K, 3000K, 4000K, 6000K, RGBW, 3CCT |           |
| <b>IK</b>                              | <b>IP</b> |
| 10                                     | 67        |





600 773

|                                        |           |
|----------------------------------------|-----------|
| <b>MATERIAL</b>                        |           |
| SS316+AL, SS316, BRASS, COPPER         |           |
| <b>INPUT VOLTAGE</b>                   |           |
| AC/DC12V, DC10-30V, 220-240VAC         |           |
| <b>POWER</b>                           |           |
| 2.5W                                   |           |
| <b>CCT</b>                             |           |
| 2700K, 3000K, 4000K, 6000K, RGBW, 3CCT |           |
| <b>IK</b>                              | <b>IP</b> |
| 10                                     | 67        |




55MM INGROUND LIGHT

|                       |                                                             |
|-----------------------|-------------------------------------------------------------|
| FRONT COVER           | Brushed 316 stainless steel/ Brushed Brass / Brushed Copper |
| LAMP BODY             | 316 stainless steel / Brass / Copper                        |
|                       | Die-casting aluminium (UV textured powder coated T=60-90µm) |
| POWER CABLE           | H05RN-F rubber cable                                        |
| OPERATION TEMPERATURE | -20°C-40°C                                                  |
| DIMMING SUPPORT       | Triac PWM Available                                         |

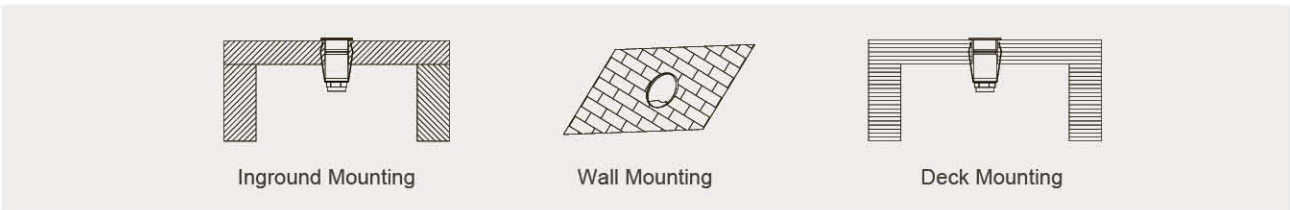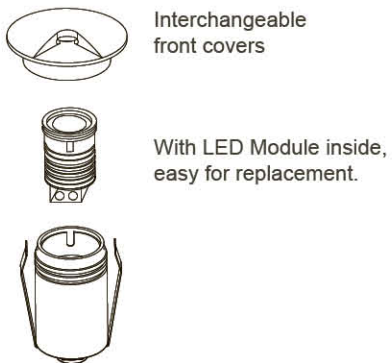

PHOTOMETRICS

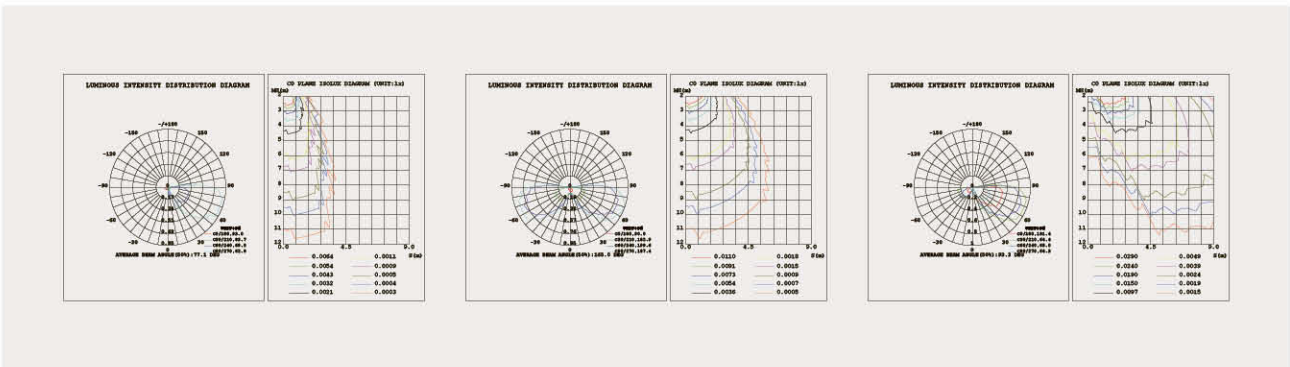




Inground Light




600 778

|                            |    |
|----------------------------|----|
| MATERIAL                   |    |
| SS316+AL                   |    |
| INPUT VOLTAGE              |    |
| DC24V, 220-240VAC          |    |
| POWER                      |    |
| 7W                         |    |
| CCT                        |    |
| 2700K, 3000K, 4000K, 5000K |    |
| IK                         | IP |
| 09                         | 67 |



600 779

|                            |    |
|----------------------------|----|
| MATERIAL                   |    |
| SS316+AL                   |    |
| INPUT VOLTAGE              |    |
| DC24V                      |    |
| POWER                      |    |
| 6W                         |    |
| CCT                        |    |
| 2700K, 3000K, 4000K, 5000K |    |
| IK                         | IP |
| 09                         | 67 |



INGROUND LIGHT

|                       |                                     |
|-----------------------|-------------------------------------|
| FRONT COVER           | Brushed 316 stainless steel         |
| LAMP BODY             | Die-casting aluminium               |
|                       | UV textured powder coated T=60-90µm |
| GLASS                 | Tempered step glass T=8mm           |
| POWER CABLE           | H05RN-F rubber cable                |
| OPERATION TEMPERATURE | -20°C-40°C                          |

OPTIONAL ACCESSORIES



Honeycomb




Square Cover


OPTICS

15° 25° 40°


ADJUSTABLE (B-1044)

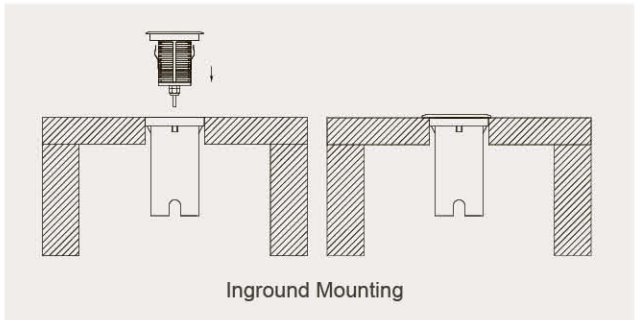

PHOTOMETRICS

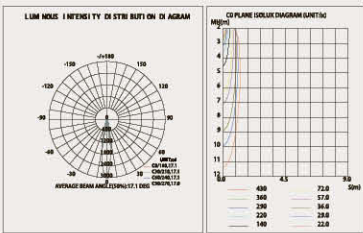

600 778

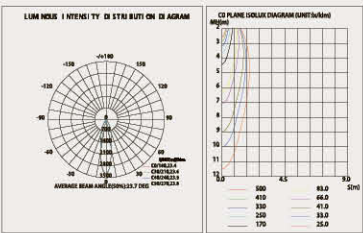

600 779






Inground Light




600 780

| MATERIAL                   |    |
|----------------------------|----|
| SS316+AL                   |    |
| INPUT VOLTAGE              |    |
| DC24V, 220-240VAC          |    |
| POWER                      |    |
| 11W                        |    |
| CCT                        |    |
| 2700K, 3000K, 4000K, 5000K |    |
| IK                         | IP |
| 09                         | 67 |

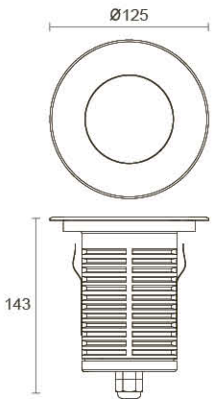

600 781

| MATERIAL                   |    |
|----------------------------|----|
| SS316+AL                   |    |
| INPUT VOLTAGE              |    |
| DC24V                      |    |
| POWER                      |    |
| 11W                        |    |
| CCT                        |    |
| 2700K, 3000K, 4000K, 5000K |    |
| IK                         | IP |
| 09                         | 67 |

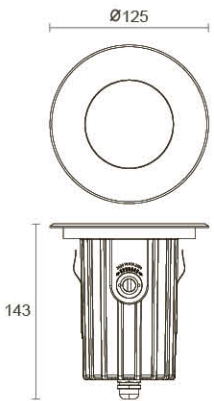

INGROUND LIGHT

|                       |                                     |
|-----------------------|-------------------------------------|
| FRONT COVER           | Brushed 316 stainless steel         |
| LAMP BODY             | Die-casting aluminium               |
|                       | UV textured powder coated T=60-90µm |
| GLASS                 | Tempered step glass T=10mm          |
| POWER CABLE           | H05RN-F rubber cable                |
| OPERATION TEMPERATURE | -20°C-40°C                          |

OPTIONAL ACCESSORIES



Honeycomb




Square Cover


OPTICS

24° 40°


ADJUSTABLE (B-1046)

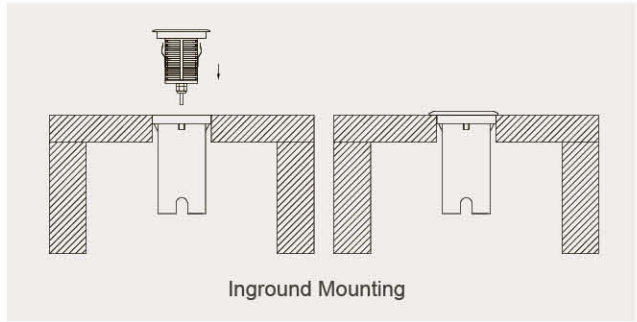

PHOTOMETRICS

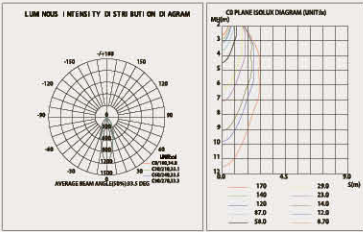

600 780

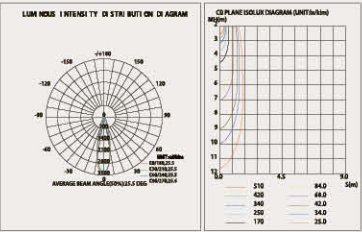

600 781






Inground Light




600 782

| MATERIAL                   |    |
|----------------------------|----|
| SS316+AL                   |    |
| INPUT VOLTAGE              |    |
| DC24V, 220-240VAC          |    |
| POWER                      |    |
| 18W                        |    |
| CCT                        |    |
| 2700K, 3000K, 4000K, 5000K |    |
| IK                         | IP |
| 09                         | 67 |

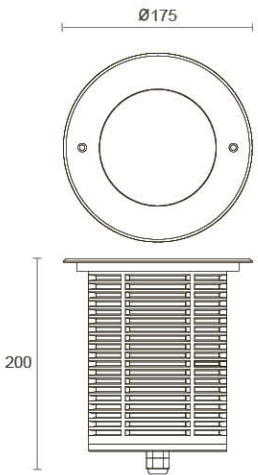

600 783

| MATERIAL                   |    |
|----------------------------|----|
| SS316+AL                   |    |
| INPUT VOLTAGE              |    |
| DC24V                      |    |
| POWER                      |    |
| 15W                        |    |
| CCT                        |    |
| 2700K, 3000K, 4000K, 5000K |    |
| IK                         | IP |
| 09                         | 67 |

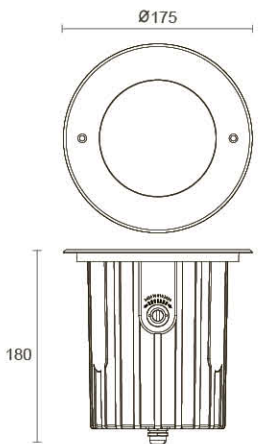

INGROUND LIGHT

|                       |                                     |
|-----------------------|-------------------------------------|
| FRONT COVER           | Brushed 316 stainless steel         |
| LAMP BODY             | Die-casting aluminium               |
|                       | UV textured powder coated T=60-90µm |
| GLASS                 | Tempered step glass T=10mm          |
| POWER CABLE           | H05RN-F rubber cable                |
| OPERATION TEMPERATURE | -20°C-40°C                          |

OPTIONAL ACCESSORIES



Honeycomb




Square Cover

OPTICS

24° 40°

ADJUSTABLE (B-1048)

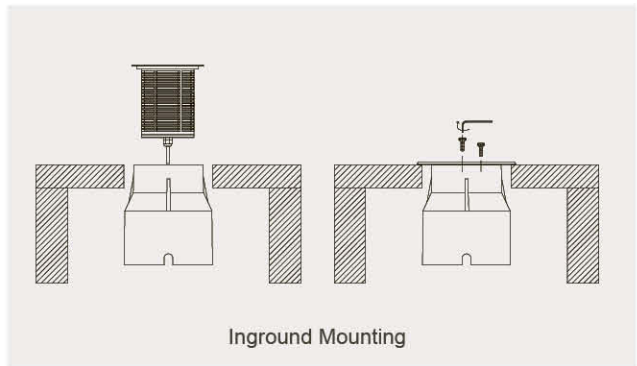


Inground Mounting




204mm

PHOTOMETRICS

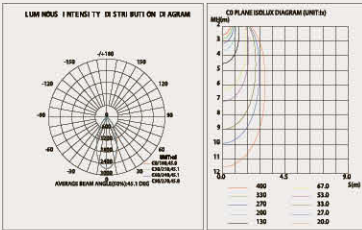

600 782

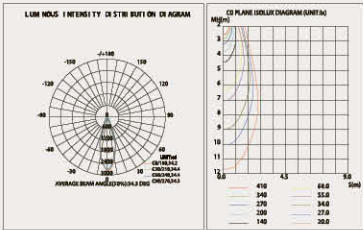

600 783





Pathway Light



600 800

| MATERIAL                               |    |
|----------------------------------------|----|
| AL, SS316, BRASS, COPPER               |    |
| INPUT VOLTAGE                          |    |
| DC12V, DC24V                           |    |
| POWER                                  |    |
| 1.5W                                   |    |
| CCT                                    |    |
| 2700K, 3000K, 4000K, 6000K, RGBW, 3CCT |    |
| IK                                     | IP |
| 10                                     | 67 |




600 800



600 801



600 802



600 803



600 804



600 805



600 808

| MATERIAL                               |    |
|----------------------------------------|----|
| AL, SS316, BRASS, COPPER               |    |
| INPUT VOLTAGE                          |    |
| DC12V, DC24V                           |    |
| POWER                                  |    |
| 1.5W                                   |    |
| CCT                                    |    |
| 2700K, 3000K, 4000K, 6000K, RGBW, 3CCT |    |
| IK                                     | IP |
| 10                                     | 67 |




600 806



600 807



600 808



600 809



600 810



600 811



600 816

| MATERIAL                               |    |
|----------------------------------------|----|
| AL, SS316, BRASS, COPPER               |    |
| INPUT VOLTAGE                          |    |
| DC12V, DC24V                           |    |
| POWER                                  |    |
| 1.5W                                   |    |
| CCT                                    |    |
| 2700K, 3000K, 4000K, 6000K, RGBW, 3CCT |    |
| IK                                     | IP |
| 10                                     | 67 |




600 812



600 813



600 814



600 815



600 816



600 816

86MM PATHWAY LIGHT

FRONT COVER

Brushed 316 stainless steel/ Brushed Brass / Antique Brass / Brushed Copper

INSERT LED COVER

PC

POWER CABLE

H05RN-F rubber cable

OPERATION TEMPERATURE

-20°C-40°C

DIMMING SUPPORT


Triac Available




Interchangeable front covers



Insert LED easy for replacement.

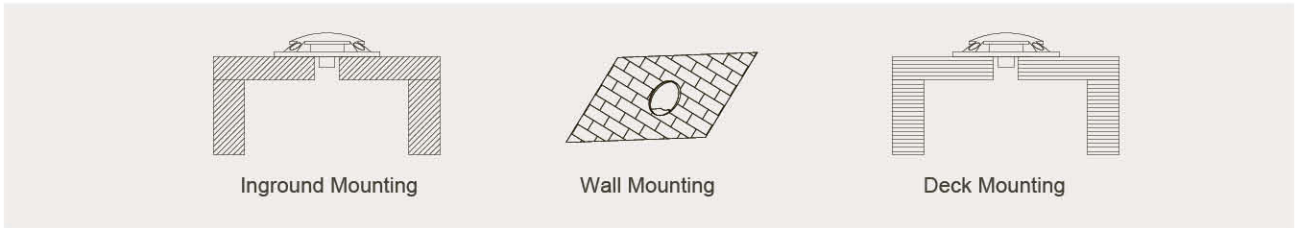

PHOTOMETRICS

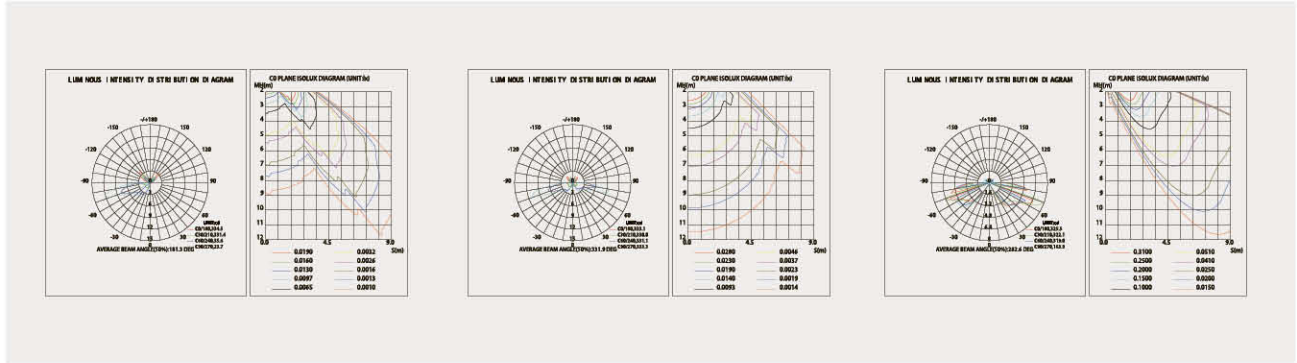




Landscape Light



600 900

| MATERIAL                   |
|----------------------------|
| AL                         |
| INPUT VOLTAGE              |
| DC12V, DC24V, 220-240VAC   |
| POWER                      |
| 3W                         |
| CCT                        |
| 2700K, 3000K, 4000K, 6000K |
| IP                         |
| 65                         |

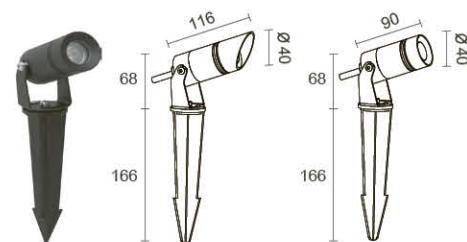


|                       |                                     |
|-----------------------|-------------------------------------|
| FRONT COVER           | Aluminium                           |
| LAMP BODY             | Aluminium                           |
| POWER CABLE           | UV textured powder coated T=60-90µm |
| OPERATION TEMPERATURE | -20°C-40°C                          |



600 901

| MATERIAL                   |
|----------------------------|
| AL                         |
| INPUT VOLTAGE              |
| DC12V, DC24V, 220-240VAC   |
| POWER                      |
| 3W                         |
| CCT                        |
| 2700K, 3000K, 4000K, 6000K |
| IP                         |
| 65                         |



MOUNTING 1 (Spike)



OPTIONAL ACCESSOR



600 905

600 906

600 907



MOUNTING 2 (Inground Surface)

MOUNTING 3 (Spot)


MOUNTING 4 (Pole)

600 902/903/904




600 902  
600 903  
600 904

| MATERIAL                   |
|----------------------------|
| AL                         |
| INPUT VOLTAGE              |
| DC12V, DC24V, 220-240VAC   |
| POWER                      |
| 3W                         |
| CCT                        |
| 2700K, 3000K, 4000K, 6000K |
| IP                         |
| 65                         |

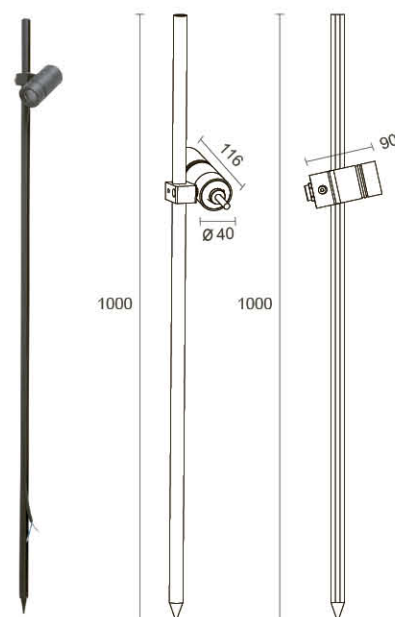

PHOTOMETRICS

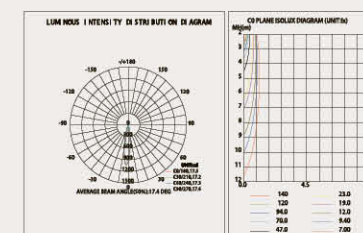




Landscape Light



600 908

|                                   |
|-----------------------------------|
| <b>MATERIAL</b>                   |
| AL                                |
| <b>INPUT VOLTAGE</b>              |
| DC12V, DC24V, 220-240VAC          |
| <b>POWER</b>                      |
| 5W                                |
| <b>CCT</b>                        |
| 2700K, 3000K, 4000K, 5000K, 6000K |
| <b>IP</b>                         |
| 65                                |

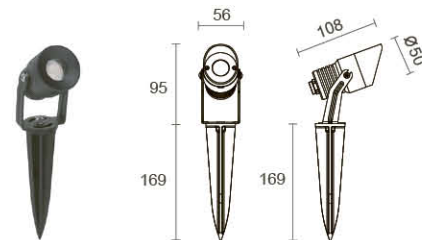

|                       |                                     |
|-----------------------|-------------------------------------|
| FRONT COVER           | Aluminium                           |
| LAMP BODY             | Aluminium                           |
| POWER CABLE           | UV textured powder coated T=60-90µm |
| OPERATION TEMPERATURE | -20°C-40°C                          |
| DIMMING SUPPORT       | Triac PWM Available                 |


OPTICS

15° 24° 36°



600 909

|                                   |
|-----------------------------------|
| <b>MATERIAL</b>                   |
| AL                                |
| <b>INPUT VOLTAGE</b>              |
| DC12V, DC24V, 220-240VAC          |
| <b>POWER</b>                      |
| 10W                               |
| <b>CCT</b>                        |
| 2700K, 3000K, 4000K, 5000K, 6000K |
| <b>IP</b>                         |
| 65                                |

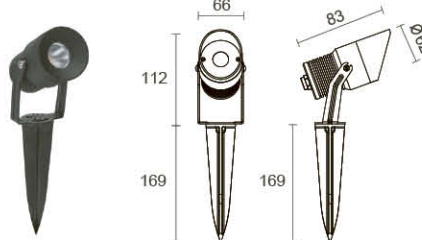

MOUNTING 1 (Spike)



MOUNTING 2 (Inground Surface)



MOUNTING 3 (Spot)



OPTIONAL ACCESSOR



MOUNTING 4 (Tree Pole Strap)




MOUNTING 5 (Pole)





600 910

|                                   |
|-----------------------------------|
| <b>MATERIAL</b>                   |
| AL                                |
| <b>INPUT VOLTAGE</b>              |
| DC12V, DC24V, 220-240VAC          |
| <b>POWER</b>                      |
| 15W                               |
| <b>CCT</b>                        |
| 2700K, 3000K, 4000K, 5000K, 6000K |
| <b>IP</b>                         |
| 65                                |

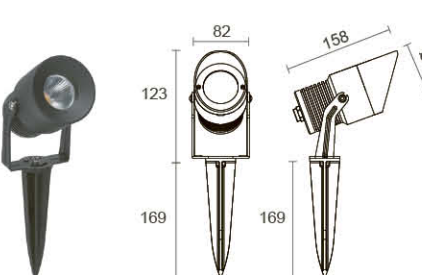


PHOTOMETRICS

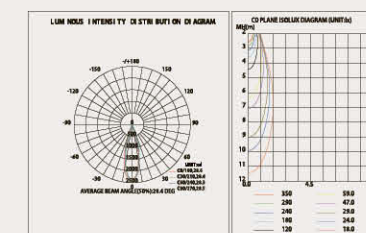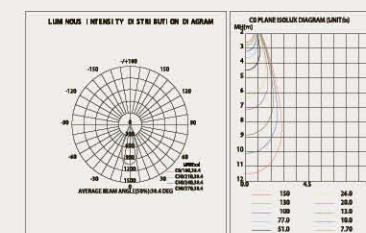

600 911

|                                   |
|-----------------------------------|
| <b>MATERIAL</b>                   |
| AL                                |
| <b>INPUT VOLTAGE</b>              |
| DC12V, DC24V, 220-240VAC          |
| <b>POWER</b>                      |
| 25W                               |
| <b>CCT</b>                        |
| 2700K, 3000K, 4000K, 5000K, 6000K |
| <b>IP</b>                         |
| 65                                |

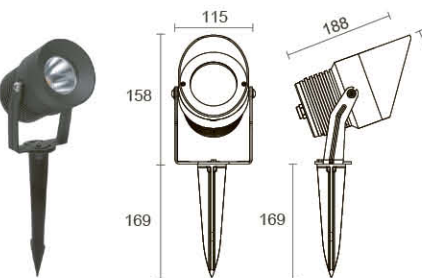



Landscape Light



|                            |
|----------------------------|
| <b>MATERIAL</b>            |
| SS316, Copper              |
| <b>INPUT VOLTAGE</b>       |
| AC/DC12V, DC24V            |
| <b>POWER</b>               |
| 3W                         |
| <b>CCT</b>                 |
| 2700K, 3000K, 4000K, 6000K |
| <b>IP</b>                  |
| 67                         |




600 912



600 913



600 914

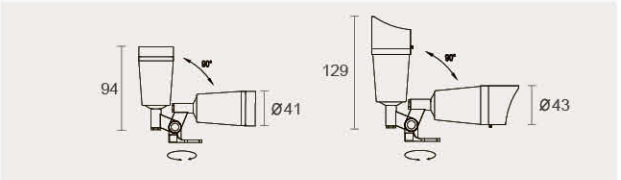

|                            |
|----------------------------|
| <b>MATERIAL</b>            |
| SS316, Copper              |
| <b>INPUT VOLTAGE</b>       |
| AC/DC12V, DC24V            |
| <b>POWER</b>               |
| 6W                         |
| <b>CCT</b>                 |
| 2700K, 3000K, 4000K, 6000K |
| <b>IP</b>                  |
| 67                         |




600 915



600 916



600 917

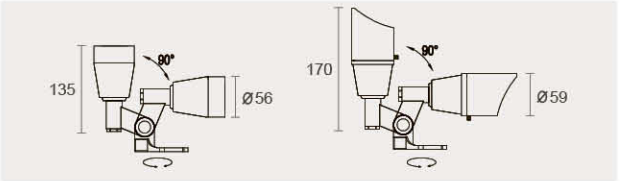

FRONT COVER  
LAMP BODY  
  
POWER CABLE  
OPERATION TEMPERATURE  
DIMMING SUPPORT

SS316, Copper  
SS316, Copper  
UV textured powder coated T=60-90µm  
H05RN-F rubber cable  
-20°C-40°C  
Triac PWM Available

OPTICS

C-1001: 15° 30° 60°  
C-1003: 15° 40° 60°

OPTIONAL ACCESSORY



ANTI-GLARE  
HOOD



HONEYCOMB  
HOOD

MOUNTING 1 (Spike)





MOUNTING 2 (Surface)



MOUNTING 3 (with anti-glare hood)



PHOTOMETRICS

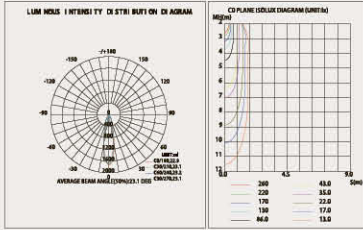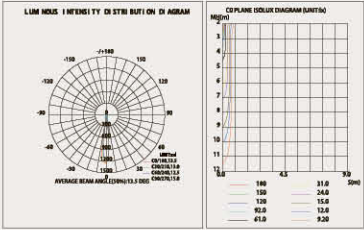



Landscape Light



|                            |
|----------------------------|
| <b>MATERIAL</b>            |
| SS316, Copper              |
| <b>INPUT VOLTAGE</b>       |
| AC/DC12V, DC24V            |
| <b>POWER</b>               |
| 3W                         |
| <b>CCT</b>                 |
| 2700K, 3000K, 4000K, 6000K |
| <b>IP</b>                  |
| 65                         |



|                            |
|----------------------------|
| <b>MATERIAL</b>            |
| SS316, Copper              |
| <b>INPUT VOLTAGE</b>       |
| AC/DC12V, DC24V            |
| <b>POWER</b>               |
| 2×3W                       |
| <b>CCT</b>                 |
| 2700K, 3000K, 4000K, 6000K |
| <b>IP</b>                  |
| 65                         |



|                            |
|----------------------------|
| <b>MATERIAL</b>            |
| SS316, Copper              |
| <b>INPUT VOLTAGE</b>       |
| AC/DC12V, DC24V            |
| <b>POWER</b>               |
| 6W                         |
| <b>CCT</b>                 |
| 2700K, 3000K, 4000K, 6000K |
| <b>IP</b>                  |
| 65                         |



|                            |
|----------------------------|
| <b>MATERIAL</b>            |
| SS316, Copper              |
| <b>INPUT VOLTAGE</b>       |
| AC/DC12V, DC24V            |
| <b>POWER</b>               |
| 2×6W                       |
| <b>CCT</b>                 |
| 2700K, 3000K, 4000K, 6000K |
| <b>IP</b>                  |
| 65                         |

|                       |                                     |
|-----------------------|-------------------------------------|
| FRONT COVER           | SS316, Copper                       |
| LAMP BODY             | SS316, Copper                       |
|                       | UV textured powder coated T=60-90µm |
| SPIKE                 | SS316                               |
| POWER CABLE           | H05RN-F rubber cable                |
| OPERATION TEMPERATURE | -20°C-40°C                          |
| DIMMING SUPPORT       | Triac PWM Available                 |

OPTICS

C-1001: 15° 30° 60°  
C-1003: 15° 40° 60°

OPTIONAL ACCESSORY



ANTI-GLARE HOOD  
600 922



HONEYCOMB  
600 923



SURFACE MOUNT  
600 924



OPTIONAL SPIKE  
600 925

PHOTOMETRICS

